

A Publication of the  
National Wildfire  
Coordinating Group

Sponsored by  
United States  
Department of  
Agriculture

United States  
Department of  
Interior

National Association  
of State Foresters

# Gaining A Basic Understanding of the National Fire Danger Rating System

## A Self-Study Reading Course



PMS XXX  
NFES yyyy

Date 2002

**Final Draft**  
**Pending Review and Approval**  
by



## PREFACE

This Self-Study Guide has been developed with the guidance of the Fire Danger Rating Working Team, under the authority of the National Wildfire Coordinating Group (NWCG).

Gaining a Basic Understanding of NFDRS is the first of a three tiered level of training dealing with the National Fire Danger Rating System (NFDRS) supported by NWCG. It is intended for everyone in fire and resource management who needs a basic understanding of NFDRS, including managers, operations specialists, firefighters, public information specialists.

Its completion is required for S491 Intermediate National Fire Danger Rating System, presented at the Geographic Area level. S491 is intended for fire program managers, operations specialists and others involved with daily operations and management of fire danger rating. It is also a prerequisite for the S-492 Long Term Risk Assessment and Advanced National Fire Danger Rating System courses.

Advanced NFDRS is presented at the National Advanced Resources Training Center (NARTC). It is intended for individuals responsible for resource decision-making based on outputs from NFDRS at the local, state, and national levels. It is also intended for potential S491 instructors and those responsible for technical support and oversight of NFDRS.

Sponsored for NWCG publication by the NWCG Fire Danger Working Team, January 2002.

---

Comments regarding the content of this publication should be directed to: National Interagency Fire Center, BLM National Fire and Aviation Training Support Group, 3833 South Development Avenue, Boise, Idaho 83705.  
e-mail: [nwcgstd.nifc.blm.gov](mailto:nwcgstd.nifc.blm.gov)

---

Additional copies of this publication may be ordered from: National Interagency Fire Center, ATTN: Great Basin Cache Supply Office, 3833 South Development Avenue, Boise, Idaho 83705. Order NFES #  
XXXX

---

## **(Alternative) PREFACE**

This Self-Study Guide has been developed with the guidance of the Fire Danger Rating Working Team, under the authority of the National Wildfire Coordinating Group (NWCG).

Gaining a Basic Understanding of NFDRS is the first of a three tiered level of training dealing with the National Fire Danger Rating System (NFDRS) supported by NWCG. It is intended for everyone in fire and resource management who needs a basic understanding of NFDRS, including managers, operations specialists, firefighters, public information specialists.

Its completion is required for S491 Intermediate National Fire Danger Rating System, presented at the Geographic Area level. S491 is intended for fire program managers, operations specialists and others involved with daily operations and management of fire danger rating. It is also a prerequisite for the S-492 Long Term Risk Assessment and Advanced National Fire Danger Rating System courses.

Advanced NFDRS is presented at the National Advanced Resources Training Center (NARTC). It is intended for individuals responsible for resource decision-making based on outputs from NFDRS at the local, state, and national levels. It is also intended for potential S491 instructors and those responsible for technical support and oversight of NFDRS.

January 2002

---

The NWCG has developed this information for the guidance of its member agencies and is not responsible for the interpretation or use of this information by anyone except the member agencies. The use of trade, firm or corporation names in this publication is for the information and convenience of the reader and does not constitute an endorsement by the NWCG of any product or service to the exclusion of others that may be suitable.

---

Additional copies of this publication are available in PDF format at the Fire Danger Working Team website: <http://www.nwcg.gov/teams/fdwt/fdwt.htm>

---

**NOTES**

## TABLE OF CONTENT

		<u>Page</u>
1.1	Course Objectives and Expectations	8
1.2	Course Administration	9
1.3	History of Fire Danger Rating Systems	10
1.4	Basic Principles of Fire Danger Rating	12
	1.4.1 Defining Fire Danger Rating	12
	1.4.2 Fire Danger Rating Systems	12
	1.4.3 The National Fire Danger Rating System	13
	1.4.4 Key Assumptions within the National Fire Danger Rating System	13
1.5	National Fire Danger Rating System Terminology	15
1.6	Basic Structure of NFDRS	18
	1.6.1 Scientific Basis	18
	1.6.2 User Controlled Site Descriptors	18
	1.6.3 Data	20
1.7	NFDRS Processors	24
	1.7.1 WIMS	24
	1.7.2 Fire Weather Plus and Weather Pro	25
	1.7.3 Fire Family Plus	25
1.8	NFDRS Outputs	27
	1.8.1 Intermediate Outputs	27
	1.8.2 Indices and Components	29
	1.8.3 Burning Index/Fire Behavior Crosswalk	32
1.9	Application of NFDRS Outputs	34
	1.9.1 Determine Regional Preparedness Levels	34
	1.9.2 Preplan Dispatch Actions	34
	1.9.3 Determine Daily Adjective Fire Danger Ratings	34
	1.9.4 Support Severity Requests	36
	1.9.5 Facilitate Briefings	37

## TABLE OF CONTENT (cont.)

	<u>Page</u>
1.9.6 Calculate Daily IFPL Values	37
1.9.7 Guide Public Use Restrictions	37
1.9.8 Assist in Wildland Fire Use Decisions	37
1.10 Operations	38
1.10.1 Station Start-up	38
1.10.2 Greenup	38
1.10.3 A Suggested Timetable for 1978 Herbaceous Stage	39
1.10.4 A Suggested Timetable for 1988 Season Codes and Greenness Factors	39
1.10.5 Continuity	40
1.10.6 Quality Control	40
2.0 Figures	41
2.0.1 Figure 1—National Fire Danger Rating System Structure	41
2.0.2 Figure 2—Flow of Information In and Around the NFDRS Processor	42
2.1 Appendices	43
2.1.1 Appendix I—Fuel Model Selection Key	43
2.1.2 Appendix II—Narrative Fuel Model Descriptions	47
2.1.3 Appendix III—Fuel Model Property Tables	51
2.1.3.1 Grass Fuel Models	51
2.1.3.2 Brush Fuel Models	53
2.1.3.3 Timber Fuel Models	55
2.1.3.4 Slash Fuel Models	57
2.1.4 Appendix IV—Climate Class Determination	59
2.1.4.1 Climate Class Selection Guide	59
2.1.4.2 Climate Class Map	60
2.1.5 Appendix V—Weather Data Requirements	61
2.1.6 Appendix VI—Concept of Break Points Described	65

## TABLE OF CONTENT (cont.)

	<b><u>Page</u></b>
2.1.7 Appendix VII—Related Subjects	67
2.1.7.1 Haines Index	67
2.1.7.2 Normalized Difference Vegetation Index	67
2.1.7.3 Automated Lightning Detection System	68
2.1.8 Appendix VIII--Season Codes and Greenness Factors	70
3.0 References	72

## **1.1 Course Objectives and Expectations**

### **1.1.1 Overview**

This is an entry-level course that addresses the basic terminology, concepts and applications of the National Fire Danger Rating System.

### **1.1.2 Target Audience**

- a. Managers, administrators, specialists, etc who's job duties require them to make or apply decisions that are supported in part by National Fire Danger Rating System outputs.
- b. Fire specialists and dispatchers responsible for the day to day operation of the National Fire Danger Rating System on their unit.

### **1.1.3 Objectives:**

Upon Completion of this course individuals will:

- a. Be able to describe the basic structure of the National Fire Danger Rating System including the various inputs that drive the system.
- b. Be able to describe the outputs of the National Fire Danger Rating System.
- c. Understand the general sensitivity of outputs relative to the inputs.
- d. Be able to describe the role NFDRS outputs play in principal fire management applications.



## 1.2 - Course Administration

This material is designed to be presented as either a self-study-reading course or in a facilitated small discussion group format. It is recommended, however that the self-study reading format be limited to those individuals who need only a conversational understanding of the National Fire Danger Rating System such as those included in the target audience group identified in section 1.1.2.a.

The facilitated small group format should be limited in size to six or eight individuals plus a facilitator. The facilitator should lead the group through the guide, one section at a time. After reading the section individually, it should be followed by a group discussion of the key points in that section. Some sections will require more discussion than others depending on the background and experience of the individuals involved. The facilitator should not proceed to the next section until all participants are comfortable with the material presented.

If you are using the small group discussion format, the facilitator should meet the following prerequisites:

- 1) Completed a geographic area or national level NFDRS course,
- 2) Had at least two seasons of direct work with inputs and outputs of the NFDRS,
- 3) Reviewed the reference material listed below.
- 4) Recommended: Completion of M-410, Facilitative Instructor or similar course.

See Section 3.0 References for publications to support this presentation.

### **1.3 - History of Fire Danger Rating Systems**

The development of fire danger rating systems in the United States closely parallels the development of fire protection programs. In the early part of the twentieth century considerable effort and money were spent developing fire suppression capabilities. These expanded fire suppression organizations, for the most part, were ineffective in dealing with the 1910 fire emergency in the northern Rockies. As a result of these suppression failures, it was determined that a system was needed to predict the potential of such events to enable managers to be better prepared in the future. Much of the early research into the subject was under the leadership of the United States Forest Service.

With our knowledge today of fire behavior, some of these early efforts seem very basic. As an example, managers in California in 1914 determined that “fire occurrence and fire behavior were related to precipitation and relative humidity”. Harry Gisborne developed a fire danger meter in the 1930’s that incorporated many of the variables we know today into a system that evaluated fire potential. For the next 25 years numerous other efforts were undertaken to develop fire danger rating systems. By 1958 there were at least nine different systems being used by the Forest Service plus numerous other systems being used by state and private protection organizations. When looking at the characteristics of the various systems that were in use, common threads were evident.

- a. All were based on either observed or empirical conditions
- b. All were based on conditions, circumstances and experience of people
- c. All included some measure of fuel type, weather regime and season of year

The individuals who developed these early fire danger rating systems knew there was a relationship between weather influences (temperature, relative humidity, precipitation, and wind) and the way initiating fires grew in size. That relationship was based on their personal experience and local observations, not scientific study.

In 1958 a decision was made to under take an effort to develop a single fire danger rating system to be used throughout the country. Early efforts focused on a four part system (risk, ignition, spread, and fuel energy). Development of the spread function was the first taken on. Developers attempted to incorporate the best features of the various local systems into one system. Their product was the Timber Spread Index and its key component, the Build-up Index which was field evaluated in the mid-1960’s by various state and federal agencies across the country. The basis for this system was still local observations of fire spread under various weather and fuel conditions. It enjoyed limited success.

In 1968 the Forest Service started work on the development of a fire danger rating system that would be built around science and engineering principles rather than local observations. It would incorporate the basic laws of physics, which are constant, therefore making the new fire danger rating system applicable anywhere in the country. Thus is the origin of the National Fire Danger Rating System.

The first version of the National Fire Danger Rating System (NFDRS) was released in 1972. It was a manually operated system consisting of various lookup tables and

nomograms. This early version included a provision for evaluation and updating the system within the first five years after release. In 1975 an automated version of the NFDRS was made available on a nationally accessible time-share computer system called AFFIRMS (Administrative and Forest Fire Information Retrieval and Management System). During the initial 5 year evaluation period several modifications and enhancements were made. The current version of NFDRS was released in 1978 and is being used by most state and federal fire protection agencies.

In 1988, in response to concerns raised by users in the southeast portion of the country relative to the accuracy and applicability of NFDRS outputs in their area, a modified version was released that included better recognition of drought and response after precipitation.

Most recently, in 1993, the AFFIRMS system was replaced by the Weather Information Management System (WIMS) as the processor of fire danger information and is currently being used by most state and Federal agencies. Several private vendors have incorporated the NFDRS computer code in PC based software programs that are being used by some state and federal agencies.

## 1.4 - Basic Principles of Fire Danger Rating

### 1.4.1 Defining Fire Danger Rating

Before one can discuss fire danger rating, they must define Fire Danger. The most commonly accepted definition of Fire Danger is: “The resultant descriptor of the combination of both constant and variable factors which affect the initiation, spread and difficulty of control of wildfires on an area.” The various factors of fuels, weather, topography and risk are combined to assess the daily fire potential on an area. Fire Danger is usually expressed in numeric or adjective terms.

Fire Danger Rating is a system that integrates the effects of existing and expected states of selected fire danger factors into one or more qualitative or numeric indices that reflect an area’s protection needs.

The Fire Danger Rating of an area gives the manager a tool to assess the day to day “fire business” decisions. The emphasize is on tool because Fire Danger Rating information is not the answer by itself; it must be considered along with the manager’s local knowledge of the area and consequences of the decision when arriving at the best solution to a fire business decision or problem.

Fire Danger Ratings are typically reflective of the general conditions over an extended area, often tens of thousands of acres, affecting an initiating fire. Ratings can be developed for either current (observed) or future (predicted) situations. They can be used to guide decisions two or three days in advance (subject to the limits of the forecasting system) as well as to compare the severity of one day or season to another.

Since many of the factors (fuels, weather and topography) and terminology (spread and intensity) that are part of fire danger rating are very similar to those that affect fire behavior predictions, fire danger and fire behavior are often confused and misused. The principle difference is that fire danger is a broad scale assessment while fire behavior is site specific. Fire danger ratings describe conditions that reflect the potential, over a large area, for a fire to ignite, spread and require suppression action. Fire behavior on the other hand deals with an existing fire in a given time and space. Fire behavior describes the movement (rate of area increase), intensity (flame length), and indicators of rapid combustion (spotting, crowning, and fire whirls) of that fire. It is expressed as real time or predicted condition for ongoing fires. As you learn more about fire danger, the differences will become more obvious.

### 1.4.2 Fire Danger Rating Systems

As one might expect, there are many parts to a fire danger rating system. It is a complex mixture of science, technology and local experience. The five key components of a fire danger rating system are:

- a. Constants defining the relationship between changes in fuels, weather, topography and risk conditions and local fire business.

- b. A system to gather data necessary to produce the rating numbers.
- c. A processing system to convert inputs to outputs.
- d. A communication system to share the fire danger rating information between entities.
- e. A data storage system to retain data for historic reference.

### **1.4.3 The National Fire Danger Rating System**

Up until this point fire danger rating has been discussed in general terms. Anyone could apply their own scale or weighting to the various fuels, weather, topography and risk factors and create their own fire danger rating system. That is exactly what happened. As agencies and organizations developed their fire protection capabilities during the first half of the 20<sup>th</sup> century, most developed some form of unique fire danger rating system as part of their program.

To develop consistency amongst protection agencies, the National Fire Danger Rating System (NFDRS) was developed in the early 70's. It was designed around four basic guidelines. The research charter said the National Fire Danger Rating System would be:

- a. Scientifically based.
- b. Adaptable to the needs of local managers.
- c. Applicable anywhere in the country.
- d. Reasonably inexpensive to operate.

In 1972 the National Fire Danger Rating System was released for general use by agencies throughout the United States.

Modifications to the original system were made in 1978 and 1988. The current system is based on the physics of combustion and laboratory developed constants and coefficients reflecting the relationships between various fuels, weather, topography and risk conditions. The National Fire Danger Rating System tracks the effects of previous weather events through their effect on live and dead fuels and adjusts them accordingly based on future or predicted weather conditions. These complex relationships and equations can be computed by nomograms and handheld calculators, but are more commonly handled by laptop or desktop computer. In any case the outputs are expressed in simple terms easily understood by users. The current National Fire Danger Rating System is utilized by all federal and most state agencies throughout the country to assess fire danger conditions.

### **1.4.4 Key Assumptions within the National Fire Danger Rating System**

There are four fundamental assumptions associated with the National Fire Danger Rating System that must be understood if the system is to be properly applied and interpreted. They include:

1. It relates only to the potential of an initiating fire, one that spreads, without crowning or spotting, through continuous fuels on a uniform slope.
2. It addresses fire activity from a containment standpoint as opposed to full extinguishment.
3. The ratings are relative, not absolute and they are linearly related. In other words if a component or index doubles the work associated with that element doubles.
4. Ratings represent near worst-case conditions measured at exposed locations at or near the peak of the normal burning period.

In summary, Fire Danger rating is a numeric scaling of the potential over a large area for fires to ignite, spread, and require fire suppression action. It is derived by applying local observations of current or predicted conditions of fuel, weather, topographic and risk factors to a set of complex science-based equations. The outputs of a fire danger rating system are numeric measures of fire business that provide a tool to assist the fire manager in making the best fire business decisions.

## **NOTES**

## 1.5 - National Fire Danger Rating System Terminology

**1 Hr Timelag Fuels** – Dead fuels consisting of herbaceous plants or roundwood less than one-quarter inch in diameter. Also included is the uppermost layer of litter on the forest floor.

**10 Hr Timelag Fuels** – Dead fuels consisting of roundwood in the size range of one quarter to 1 inch in diameter and very roughly, the layer of litter extending from just below the surface to three-quarters of inch below the surface.

**100 Hr Timelag Fuels** – Dead fuels consisting of roundwood in the size range of 1 to 3 inches in diameter and, very roughly, the forest floor from three quarters of an inch to 4 inches below the surface.

**1000 Hr Timelag Fuels** – Dead fuels consisting of roundwood 3 to 8 inches in diameter or the layer of the forest floor more than about 4 inches below the surface or both.

**Annual Plant** – A plant that lives for one growing season, starting from a seed each year.

**Brush** – Scrub vegetation and stands of tree species that do not produce merchantable timber. (Not a synonym for slash.)

**Dead Fuels** – Naturally occurring fuels whose moisture content is governed by external factors such as temperature, relative humidity and precipitation.

**Duff** – The partially decomposed organic material of the forest floor that lies beneath the freshly fallen twigs, needles and leaves. (The F and H layers of the forest soil profile.)

**Equilibrium Moisture Content** – The moisture content that a fuel particle will attain if exposed for an infinite period in an environment of specified constant temperature and humidity. When a fuel particle has reached its equilibrium moisture content, the net exchange of moisture between it and its environment is zero.

**Fire Danger Rating Area** – A geographic area relatively homogenous in climate, fuels and topography within which the fire danger can be assumed to be uniform.

**Forb** – A non-grass-like herbaceous plant.

**Fuel Class** – A group of fuels possessing common characteristics. In the NFDRS, dead fuels are grouped according to their timelag (1, 10, 100, and 1000 hr) and live fuels are grouped by whether they are herbaceous (annual or perennial) or woody.

**Fuel Model** – A simulated fuel complex or which all the fuel descriptors required by the mathematical fire spread model have been supplied.

**Fuel Moisture Content** – The water content of a fuel particle expressed as a percent of the oven-dry weight of the particle. Can be expressed for either live or dead fuels.

**Fuels** – Non-decomposed material, living or dead, derived from herbaceous plants.

**Herb** – A plant that does not develop woody, persistent tissue but is relatively soft or succulent and sprouts from the base (perennials) or develops from seed (annuals) each year. Included are grasses, forbs, and ferns.

**Herbaceous Vegetation Moisture Content** – The water content of a live herbaceous plant expressed as a percent of the oven-dry weight of the plant.

**Litter** – The top layer of the forest floor, typically composed of loose debris such as branches, twigs, and recently fallen leaves or needles; little altered in structure by decomposition. (The L layer of the forest soil profile.)

**Live Fuels** – Naturally occurring fuels whose moisture content is controlled by the physiological processes within the plant. The National Fire Danger Rating System considers only herbaceous plants and woody material small enough (leaves, needles and twigs) to be consumed in the flaming front of a fire.

**Moisture of Extinction** – The theoretical fuel moisture content above which a fire will not spread.

**Perennial Plant** – A plant that lives for more than two growing seasons. For Fire danger rating purposes, biennial plants are classed with perennials.

**Roundwood** – Boles, stems, or limbs of woody material; that portion of the dead wildland fuels which are roughly cylindrical in shape.

**Shrub** – A woody perennial plant differing from a perennial herb by its persistent and woody stem; and from a tree by its low stature and habit of branching from the base.

**Slash** – Branches, bark, tops, cull logs, uprooted stumps, and broken or uprooted trees left on the ground after logging; also debris resulting from thinning or wind storms.

**Slope** – The rise or fall in terrain measured in feet per 100 feet of horizontal distance measurement, expressed as a percentage.

**Surface-to-Volume Ratio** – The ratio of the surface area of a fuel particle (in square-ft) to its volume (in cubic-ft). The “finer” the fuel particle, the higher the ratio; for example, for grass this ratio ranges above 2,000; while for a  $\frac{1}{4}$  inch diameter stick it is 109.

**Timelag** – The time necessary for a fuel particle to lose approximately 63 percent of the difference between its initial moisture content and its equilibrium moisture content.

**Timelag Fuel Moisture Content** – The moisture content corresponding to the various timelag fuel classes.



**NOTES**

## 1.6 - Basic Structure of the National Fire Danger Rating System

The structure of the National Fire Danger Rating System is quite simple. There are three major parts: Scientific Principles, User Controlled Assumptions, and Data (both weather and non-weather). The next section discusses each of these parts in detail. For a schematic display of the NFDRS structure and how it relates to other systems and activities refer to Figures 1 and 2 in the Appendix.

### 1.6.1 Scientific Basis

These are fixed parameters and constants applied through the various mathematical formulae used to calculate fire danger. They control the fire-spread calculations and represent basic principles of combustion physics. Most are laboratory-determined values and incorporate such factors as the ignition temperatures of woody material, rates of combustion, the moisture of extinction of various types of plant material, the chemical properties of woody debris, and heat energy potential. Most NFDRS users rarely have need for more than a casual understanding of this part of the system. The values are constant and are imbedded within the processors used to calculate fire danger outputs. (See Deeming et al 1977, Bradshaw et al 1983, Burgan 1988, Section 3.0 References.)

### 1.6.2 User Controlled Site Descriptors

This information describes the site or area that you are calculating fire danger ratings for. They represent a critical part of the operation of the National Fire Danger Rating System. The best weather data in the world will not produce representative NFDRS values if the description assumptions are not representative of your local conditions. The following is a discussion of the various site descriptor assumptions users must make when implementing the National Fire Danger Rating System on their unit. They are generally only input once by the user but can be modified to fine-tune outputs to better fit local conditions.

*Fire Danger Rating Area:* This is an area of generally homogenous fuels, weather, and topographic features, tens of thousands of acres in size. They can reflect either a portion of or an entire administrative unit. Most people, when starting out, tend to make fire danger rating areas too small. The guiding principle should be that your fire danger rating areas should reflect individual areas where you will make different fire related decisions. If you always treat your administrative unit the same, then you only need one fire danger rating area. If you have zones that may be treated differently, then multiple fire danger rating areas are appropriate.

*Fuel Models:* A fuel model is a set of numbers representing the contribution of the dead and live plant material representative of your fire danger rating area. It reflects the volume, size, weight, type, depth, surface to volume ratio and other physical properties of

the fuel bed. As can be expected with a national system, the number of different fuel beds is almost infinite.

The National Fire Danger Rating System groups all fuel beds into six general classes based on the predominate ground fuels: Lichens and mosses; Marsh grasses and reeds; Grasses and forbs; Brush, shrubs and tree reproduction; Trees; and Slash. Several of these are broken into sub-classes thus producing a total of 20 different groupings or fuel models. A fuel model is not intended to be a perfect match to the local fuel bed conditions, only a reasonable representation.

Appendix I is a dichotomous key that has been developed to aid in the selection of the appropriate fuel models. For communication purposes, National Fire Danger Rating System fuel models are referred to using alpha characters, A to U. (The Fire Behavior Prediction System uses numeric names (1-13) for the fuel models used in that system.)

Appendix II contains a narrative description of each fuel model. Different sets of fuel models are involved in the 1978 and 1988 versions of the NFDRS model. Appendix III displays the physical properties of each fuel model used in the National Fire Danger Rating System. Both are good references to validate your use of the dichotomous key. Often users get caught in the trap of using the narrative description of the fuel model rather than the physical properties of the model. Open Ponderosa Pine stands are typically thought of as being Fuel Model C but a closer look may reveal that there is an understory of brush or other tree species which may make it more like a Fuel Model T. When selecting representative fuel models for your rating area use all the tools available, the dichotomous key, the narrative descriptions and the table of physical properties.

*Slope Class:* Slope is the rise or fall in the terrain measured in the number of feet change per 100 feet of horizontal distance. It is expressed as a percentage. The slope class should represent the rating area as a whole. When determining slope class, keep in mind that terrain is usually not uniform and that benches or small flats affect the average slope for an area. The National Fire Danger Rating System groups slope into five classes: 0-25, 26-40, 41-55, 56-75, and greater than 75 percent. They are labeled numerically, 1 through 5. The effect of slope class is significant on NFDRS outputs in that for every increase in slope class, the calculated rate of spread doubles when all other factors are constant.

*Grass Type (live fuel type):* The National Fire Danger Rating System recognizes that there are seasonal differences in fire danger related to the type of grass vegetation present. Annual vegetation produces a different dynamic situation within the fuel complex than does perennial vegetation. Annuals sprout from a seed each year, grow, reach maturity and die usually all in one season. This process is not affected significantly by seasonal weather factors such as temperature or precipitation. Perennial grasses on the other hand, generally start in a dormant condition, grow, reach maturity, then go back into dormancy. Their cycle is greatly affected by temperature and precipitation. Because of these differences, the mathematical formulae or algorithms associated with the drying of herbaceous vegetation are different for the two types of grasses. The loading of fine fuels associated with annual grasses shift from live to dead and stays there for the duration of the season. For perennial grasses the shift from live to dead is much slower

and may even stop or reverse if the right combinations of temperature and precipitation occur during the season. Where both annual and perennial grasses occur together select the type that predominates the site.

*Climate Class:* The National Fire Danger Rating System recognizes that vegetation adapts to the general climate of the area and that some of these characteristics affect seasonal fire danger. For example, the herbaceous plants common to a warm maritime climate have a different growing season pattern than those that have evolved in a dry arid environment. Generally the growing period when individual plants are lush and green is longer in the maritime climates than in the arid climates. The NFDRS uses four climate classes, numbered 1 through 4. Class 1 represents arid or semi-arid desert or steppe country. Class 2 represents the semi-humid climate where summer time moisture is deficient common to the interior west. Class 3 represents the semi-humid climate where summer time precipitation is adequate to sustain plant growth most of the season typical of the mountain west and the area east of the Mississippi. Class 4 represents the wet coastal areas where summertime precipitation and fog are common typical of the Pacific Coast. Appendix IV gives a more detailed description of each climate class as well as a map showing where the various climate classes typically occur across the country.

Associated with each climate class is an assumption as to the length of a typical growing season. In the NFDRS model, herbaceous fuel moistures increase for the number of days associated with each climate class. In Climate Class 1 the season is very short, only 7 days. In Climate Class 2 it is 14 days, in Climate Class 3 it is 21 days and in Climate Class 4 it is 28 days. Most NFDRS publications include a map showing the distribution of climate classes across the country. These maps are an approximation and should only be used as a guide. Users should examine the characteristics of herbaceous vegetation common in their area to select the climate class that best fits their situation.

*Annual Precipitation:* This is a critical input for those units using the 1988 revision to the National Fire Danger Rating System or those desiring to use the Keetch-Byram Drought Index (KBDI) as an adjunct to the NFDRS. The KBDI is a separate system developed in the southeast part of the United States to address the affects long term drying, i.e. drought, on the forest soils and duff layer. The relationship between air temperature and the daily KBDI drought adjustment factors varies for different levels of annual precipitation. Therefore the amount of annual precipitation is needed to select the appropriate lookup table or equation to use when deriving the daily drought factor. Some NFDRS processors require an entry in this field, regardless of whether you intend to use the KBDI or not. The best source for this information is local climatological data or precipitation maps. Accuracy of plus or minus 5 inches of precipitation per year is adequate.

### **1.6.3 Data**

The data used to calculate daily fire danger rating indices and components comes in two forms. The first is the daily weather observations and the second is the parameters that the user sets to control the actual calculations within the NFDRS processor. Each is discussed below.

*Weather Inputs:* Of the factors that affect the daily changes in fire danger, weather data is the most significant. Data should be reflective of conditions experienced or anticipated to occur within the fire danger rating area. The National Fire Danger Rating System can be operated on either observed data to produce indices and components reflective of today's conditions or on forecasted data to predict tomorrow's conditions. The data needs are the same; where they come from is the only difference. Observed data is obtained from locally operated manual or automated weather stations. Weather forecasters of the National Weather Service develop the predicted data using trends applied to observed conditions within a fire weather zone. (As an example a forecaster might determine for a specific weather zone that tomorrow's temperature would be up 3 degrees, relative humidity will be down 5 percent and there will be no change in wind speed). This information is applied automatically within the NFDRS processor to today's observed conditions at all stations within the weather zone to calculate the forecasted conditions. NFDRS calculations are usually done on data representative of 1 p.m. local standard time conditions. For additional information as to the specific weather data needed to process NFDRS outputs, refer to the Weather Observations in Appendix V of this document.

Quality control is very important, both of the data itself and in the instruments used to collect it. Individuals responsible for the daily input of weather data into NFDRS should be familiar with the normal or expected ranges in temperature, relative humidity, wind speed, etc for their local area and take appropriate actions to validate observations that are outside the normal range. Similarly they should be aware of values that change little from day to day. This could be a sign that a sensor or instrument is not working properly. Errors in some data elements such as relative humidity have cumulative effects on fire danger rating if allowed to continue over extended periods of time. A final comment on quality control. A continuous stream of data is just as important as the quality of the data itself. If daily observations are missed two things happen. First you lose the effects of the day on the drying or wetting of the fuels which may be significant in the early and later parts of the fire season. Secondly, there is no data for the National Weather Service forecasters to use in developing their forecasts or to apply their trends or point forecasts to, thus no forecasted fire danger for the next day.

*Other NFDRS Parameters:* The mathematical equations that generate the outputs of the NFDRS are not perfect. There are certain conditions and observations that users of the system must input periodically for the outputs to be truly representative of their local conditions. For lack of a better term these are grouped as other inputs.

*State of Herbaceous Vegetation:* As stated earlier, both annual and perennial herbaceous vegetation go through a growing period, a curing period, and a dormant period. Some of these changes can be modeled, some can't. NFDRS users must be aware of changes occurring in the field and make an appropriate entry to accommodate factors that the model can not deal with. For example, once herbaceous vegetation is subjected to a killing frost, no subsequent change in temperature will bring it back to life for that season. The actual killing frost temperature is not necessarily 32 degrees for all plant species. Therefore the NFDRS user must enter the occurrence of a killing frost based on local conditions.

Secondly, some refer to the period that plants are actively growing as the period of green-up. In the NFDRS, the climate class you assign to the fire danger rating area controls the length of this “growing season”. The model can estimate when the growing season ends but it cannot determine when to start the growing season. Therefore each year the user must enter a date the growing season begins. Depending on the area, this date may vary by elevation, seasonal weather pattern, etc. Start of green-up can only be determined by observing what is actually happening in the field.

Finally, many areas operate the fire danger rating system before green-up occurs but after the snow has left the fuels. Under these dormant conditions, the herbaceous plant material from the previous growing season is treated as dead fuel in fire danger calculations. For both stations operated on a year round or seasonal basis, the user must manually adjust the shift from frozen to pre-green herbaceous vegetation condition to reflect this period of the year before green-up starts. (See section 1.10 Operations for operational details on station start-up and greenup.)

Shrub Type Code: One of the modifications made in the 1988 revision to the NFDRS was to recognize differences between shrub types. Separate equations were developed for deciduous and evergreen shrub vegetation. Therefore, users of the 1988 fuel models must enter a code indicating whether their local shrub vegetation is deciduous (D) or evergreen (E).

Staffing Index and Display Class Breakpoints: The various processors used to calculate NFDRS indices and components also include the capability of displaying the outputs by group or class. The NFDRS user must first determine which indices or components they want to use to base staffing or other actions on. Generally this is determined by unit fire managers and may be specific to the local unit or applicable to several units in a larger geographical area. After the indices or component is selected, the number of breakpoints or classes must be identified. Again this is usually determined by the unit fire manager or in some cases the agency they work for. The number of classes is usually based on the number of different decisions that are to be made using that index or component. For example if a unit has a choice between three levels of dispatch response, they would create three classes within the specific index or component chosen to guide their dispatch response.

It is also necessary to designate where the individual classes are to be broken. Included in the formulae that execute the NFDRS are equations that automatically determine the breakpoints between classes. All the user has to do is tell the model where to start. The initiating breakpoint is usually an agency policy decision. For example, the United States Forest Service uses the 90<sup>th</sup> and 97<sup>th</sup> percentile values for the specific indices as a starting point. The Bureau of Land Management uses 80<sup>th</sup> and 95<sup>th</sup> percentile values for their starting points. An analysis of historic indices and component values as well as fire occurrence is necessary to select the appropriate class breakpoints for local applications. See Appendix VI for additional discussion of break points.

Measured Woody Fuel Moisture: Occasionally the modeled fuel moisture of live woody material does not track with the actual conditions on the ground. In these instances, fire managers may take physical measurements of the moisture content of the

small branch wood and foliage of live woody plants and enter the value into the NFDRS processor to override the modeled values. It should be remembered that once you enter a measured woody fuel moisture value it stays unchanged in the system for 30 days unless it is replaced by a subsequent measured value. Most processors also require that you enter the date that the last measured woody fuel moisture value was entered. Live fuel moisture should be measured every 30 days. If no new measured value is entered within 30 days, the processor automatically goes back to using the modeled values.

Season Codes and Greenness Factors: These are additional data needs resulting from the changes made during the 1988 revision to the NFDRS. They are only required if you are using the 1988 fuel models. The season code corresponds to the season of the year the observations are being taken. The seasonal breakdown does not necessarily correspond to the calendar days typically represented by each season. Rather they represent the various stages in plant development. Winter is the dormant season when no growth is occurring and the leaves have fallen. Spring is the growing season. Summer is the period when the mature vegetation transitions to dormancy. Fall is the period the leaves are falling and the plants are entering dormancy.

In addition to the season codes, it is necessary, if using the 1988 fuel models, to enter a greenness factor for both the grasses and shrubs. Values are scaled from 0 to 20 with 0 being near dead and 20 representing conditions of maximum greenness or flush. These values must be updated regularly based on field observations as the season progresses.

Refer to Appendix VIII for additional information regarding season codes and greenness factors.

KBDI Initiation: The Keetch-Byram Drought Index (KBDI) is a stand alone drought index that can be used in conjunction with the National Fire Danger Rating System if you are using the 1978 fuel models but is required if you are using the 1988 fuel models. (KBDI controls the drought fuel load in the 1988 fuel models.) In either event it is important that the Index is initialized at the start of each season. Since the index is an estimate of the amount of precipitation (in 100ths of inches) needed to bring the moisture content of the top 8 inches of soil back to saturation, a value of 0 is complete saturation of the soil. Since most fire danger stations are not being operated when the soil is in a saturated condition so it is necessary to estimate what the KBDI value is when daily observations are began. The technical documentation describing the KBDI includes methodology to estimate the initiating value. Most processors include a default initiation value of 100.

## **1.7 - NFDRS Processors**

National Fire Danger Rating System calculations were originally done by hand using look-up tables and nomograms. These were replaced by hand held programmable calculators and main frame computers. Sometimes the memory capacity of the calculators or computers being used caused programmers to leave out certain features of the National Fire Danger Rating system. As a consequence different results were often obtained using what appeared to be the same input data.

In 1997 the National Advisory Group for Fire Danger Rating (NAGFDR) agreed to support one set of NFDRS computer code. Today there are three basic processors that produce daily NFDRS indices and components: Weather Information Management System (WIMS), Firefamily Plus, and Fire Weather Plus. Any inclusion of the NFDRS computer code in other processor must be approved by the Fire Danger Working Team (formerly NAGFDR). Each of the currently approved processors is discussed below.

### **1.7.1 Weather Information Management System - WIMS**

WIMS is a comprehensive system that helps users manage weather information. Many federal and state fire and resource management agencies use WIMS to calculate their daily fire danger ratings.

Among the many sub-systems of WIMS is the processing software code for the National Fire Danger Rating System. It runs on the IBM mainframe computer at the USDA National Information Technology Center in Kansas City (NITC –KC). The system is accessible 24 hours a day from a personal computer via the internet or other communication software. All calculations are done on the mainframe.

Hourly data from remote automatic weather stations (RAWS) across the country are collected by satellite and stored in WIMS for 2 years. Daily data necessary for NFDRS calculations (e.g. maximum and minimum temperature and relative humidity; 1300 hour observations) are archived in the National Interagency Fire Management Integrated Database (NIFMID) for future reference and analysis. Only weather data is archived. NFDRS outputs associated with archived data have to be re-calculated.

The principal advantage of a centralized processing system like WIMS is that the information can be automatically stored and is available to all users. A user can easily view anyone else's station records, data, and outputs without additional phone calls or connections. For security reasons only the station owner can modify the information however.

Several enhancements are being made to WIMS. A WIMS/web interface has been developed. Automatic measures of solar radiation will replace manual estimates of "state of the weather". Archived data will be more accessible via the web. Products, displays, and applications will be expanded. In the short term (5 years) WIMS will be able to collect data from non-satellite based remote weather stations automatically. This involves establishment of hubs that dial up remote weather station sites with telephone



access and download data on a pre-scheduled basis. This capability is critical, especially where agencies need to share near real time data.

### **1.7.2 Fire Weather Plus and Weather Pro**

Fire Weather Plus and Weather Pro are privately developed software packages distributed by Forestry Technology Systems (FTS) and Remsoft, Inc. respectively. Both were developed to support fire danger calculations for remote weather data collection platforms that were marketed by the respective companies. Fire Weather Plus and Weather Pro can be operated on any PC usually with telephone or radio modem capability to retrieve data. The core of the package is the same NFDRS processing software as used in WIMS or FireFamily Plus thus NFDRS outputs are the same if similar station parameters are cataloged. The developers have added data retrieval, communication and graphing features that make a complete package now able to interface with other automated weather stations.

The principle advantages of using Fire Weather Plus or Weather Pro software are that all calculations are done on your local PC workstation and that the software also includes graphic display capabilities of the calculated NFDRS outputs.

Since both are independent systems both systems require special actions on the part of the user operating it to make their weather observations available to others to use. Most commonly this involves uploading the individual observations into WIMS where it can be stored for use by others such as the National Weather Service when making forecasts. A hub has been established at NITC-KC that can automatically retrieve data for remote sites and upload it into WIMS though the data still requires some editing before it can be sent to the NWS or forwarded to NIFMID for archiving.

### **1.7.3 Firefamily Plus**

FireFamily Plus is a PC Windows (95/98/NT) application that operates against an Microsoft Access database. It provides extensive summaries of fire weather/danger climatology and occurrence for one or more weather stations extracted from the NIFMID. The FireFamily Plus database is compatible with fire planning tools and allows pooling of fire occurrence and weather data from adjoining regions covered by different protection agencies, where fire-days, large fire-days, and multiple fire-days are systematically integrated with fire weather.

The principle advantage of FireFamily Plus is that fire danger as a measure of fire business can be analyzed. FireFamily Plus is a suite of applications including fire danger climatology trends and decision points, fire business thresholds, fire fighter pocket cards of local fire danger information, troubleshooting analysis, and weather, fire danger and fire occurrence summaries.

The value of this software package is its versatility as a troubleshooting, analysis or training tool. Users can play what-if games. Questions such as “what happens if I change fuel models, climate class, etc?” can be answered without affecting the data you are using for your daily fire management decisions. As a training tool, it can allow the

user to display the consequences of missing data, erroneous observations, etc. simply by entering the poor quality data without corrupting the permanent historic database.

## 1.8 - NFDRS Outputs

The NFDRS calculations result in two types of outputs. These are intermediate outputs that serve as the “building blocks” for the next day’s calculations and the indexes and components that actually measure the fire danger. An understanding of both is important if the user is to properly manage and utilize the National Fire Danger Rating System.

### 1.8.1 Intermediate Outputs:

These are the calculated fuel moisture values for the various classes of live and dead fuels used to produce the final indices and components. An understanding of these values, including their ranges, seasonal patterns, and associated impacts on indices and components is critical in maintaining the quality of the overall outputs of the system. A trained eye can look at the intermediate outputs and tell what the model thinks is happening on the ground. If they are not representative of what the local fire manager sees happening, they can be adjusted to “fine tune” the system outputs to better fit the local conditions.

*Herbaceous Fuel Moisture:* This calculated value represents the approximate moisture content of live herbaceous vegetation expressed as a percentage of the oven dry weight of the sample. Both the herbaceous vegetation type (annual or perennial) and the climate class control the rate of drying in the NFDRS processor. Faster drying occurs in annual plants than in perennials and plants native to moist climates respond differently to a given precipitation event than plants native to an arid climate would to an event of the same magnitude. Accurate recording of the herbaceous vegetation type and the climate class are critical if the calculated herbaceous fuel moisture is to be representative of the local area.

Typical herbaceous Fuel Moisture values start out low then increase rapidly as the growing season progresses. They may range from a high of 250, typical of the peak of the growing season to as low as 3 or 4 when the foliage is dead or reached maximum dormancy and responds as a dead fuel would to changes in external moisture influences only. Most processors initiate the season with a herbaceous fuel moisture value of 30, which is the threshold moisture content between living and dead vegetation. Fire managers should monitor the trend of herbaceous fuel moisture values as part of their validation of NFDRS outputs.

*Woody Fuel Moisture:* This calculated value represents the approximate moisture content of the live woody vegetation (shrubs, small stems, branches and foliage) expressed as a percentage of the oven dry weight of the sample. As with the herbaceous fuel moisture, it varies significantly by climate class. Plants native to moist environments tend to have higher woody fuel moisture values than those native to more arid climates. Woody fuel moisture values typically range from a low of 50 or 60 observed just before the plant begins to grow in the spring to a high of approximately 200 reached at the peak of the growing season. The default value used in NFDRS processors to initiate the season varies by the climate class. In climate class 1 the default value is 50. For climate class 2 it is 60. Climate class 3 uses 70 and climate class 4 uses 80.

*Dead Fuel Moisture:* This is the moisture content of dead organic fuels, expressed as a percentage of the oven dry weight of the sample, that is controlled entirely by exposure to environmental conditions. The NFDRS processor models these values based on inputs such as precipitation and relative humidity. There is modeled fuel moisture for each of the four time lag fuel classes recognized by the system. Remember time lag is the time necessary for a fuel particle of a particular size to lose approximately 63 percent of the difference between its initial moisture content and its equilibrium moisture content in its current environment.

*1 Hr Fuel Moisture Content:* – The 1-hour fuel moisture content represents the modeled fuel moisture of dead fuels from herbaceous plants or roundwood that is less than one-quarter inch in diameter. Also included is the uppermost layer of litter on the forest floor. Due to its size, this size fuel is very responsive to the current atmospheric moisture content. It varies greatly throughout the calendar day and is principally responsible for diurnal changes in fire danger.

*10 Hr Fuel Moisture Content:* – This is the moisture content of dead fuels consisting of roundwood in the size range of one quarter to 1 inch in diameter and very roughly, the layer of litter extending from just below the surface to three-quarters of inch below the surface. The NFDRS processors model this moisture value based on length of day, cloud cover, temperature and relative humidity. Ten-hour fuel moisture values vary somewhat with diurnal changes but vary more so with day to day changes in weather. The 10-hour fuel moisture is the only dead fuel moisture value that is measured. NFDRS processors will accept measured values if they are obtained by either weighing  $\frac{1}{2}$  inch dowel fuel sticks or through the use of an approved fuel moisture sensor associated with an automated weather station platform. Values can range from 1 to 30.

*100 Hr Fuel Moisture Content:* – The 100 hour fuel moisture value represents the modeled moisture content of dead fuels in the 1 to 3 inch diameter class. It can also be used as a very rough estimate of the average moisture content of the forest floor from three-fourths inch to 4 inches below the surface. The 100-hour timelag fuel moisture is a function of length of day (as influenced by latitude and calendar date), maximum and minimum temperature and relative humidity, and precipitation duration in the previous 24 hours. Values can range from 1 to 53 percent. A default value based on the climate class of the priority #1 fuel model module in the station catalog will automatically be used if there is a break of 30 days or more in the observations entered.

*1000-Hr Fuel Moisture Content:* - This value represents the modeled moisture content in the dead fuels in the 3 to 8 inch diameter class and the layer of the forest floor about 4 inches below the surface. The value is based on a running 7-day average. The 1000-hour timelag fuel moisture is a function of length of day (as influenced by latitude and calendar date), daily temperature and relative humidity extremes (maximum and minimum values) and the 24-hour precipitation duration values for a 7-day period. Values can range from 1 to 141 percent.

*X-1000 Hr Fuel Moisture Value*: - The X-1000 value is not truly a dead fuel moisture value. It is the live fuel moisture recovery value. It is discussed here since it is derived from the 1000-hr fuel moisture value. It is an independent variable used in the calculation of the herbaceous fuel moisture. The X-1000 is a function of the daily change in the 1000-hour timelag fuel moisture, and the average temperature. Its purpose is to better relate the response of the live herbaceous fuel moisture model to the 1000-hour timelag fuel moisture value. The X-1000 value is designed to decrease at the same rate as the 1000-hour timelag fuel moisture, but to have a slower rate of increase than the 1000-hour timelag fuel moisture during periods of precipitation, hence limiting excessive herbaceous fuel moisture recovery. The X-1000 value can vary between fuel models at the same station.

NOTE: Weather observations must be started 3 to 4 weeks prior to the onset of green-up to assure that the 1000-hour timelag fuel moisture, and associated X-1000 have stabilized at a reasonable value for the current weather conditions.

### **1.8.2 Indices and Components:**

The following paragraphs address each component and index of the National Fire Danger Rating System. They include a definition of each, its numeric value ranges, the designed function of the component or index. A word about the numbers generated by the NFDRS. They are relative in the sense that as the value of a component or index doubles, the activity measured by that component or index doubles. (An Ignition Component of 60 has twice the ignition probability of an Ignition Component of 30.) This helps the users of the NFDRS interpret the meaning of the numbers produced for their protection area.

*Ignition Component – (IC)* The Ignition Component is a rating of the probability that a firebrand will cause a fire requiring suppression action. Since it is expressed as a probability; it ranges on a scale of 0 to 100. An IC of 100 means that every firebrand will cause an “actionable” fire if it contacts a receptive fuel.

Likewise an IC of 0 would mean that no firebrand would cause an actionable fire under those conditions. Note the emphasis is on action. The key is whether a fire will result that requires a fire manager to make a decision. The Ignition Component is more than the probability of a fire starting; it has to have the potential to spread. Therefore Spread Component (SC) values are entered into the calculation of IC. If a fire will ignite and spread, some action or decision is needed.

*Spread Component – (SC)* The Spread Component is a rating of the forward rate of spread of a headfire. Deeming, et al, (1977), states that “the spread component is numerically equal to the theoretical ideal rate of spread expressed in feet-per-minute”. This carefully worded statement indicates both guidelines (it’s theoretical) and cautions (it’s ideal) that must be used when applying the Spread Component. Wind speed, slope and fine fuel moisture are key inputs in the calculation of the spread component, thus accounting for a high variability from day to day. The Spread Component is expressed on an open-ended scale; thus it has no upper limit.

Energy Release Component - (ERC) The Energy Release Component is a number related to the available energy (BTU) per unit area (square foot) within the flaming front at the head of a fire. Daily variations in ERC are due to changes in moisture content of the various fuels present, both live and dead. Since this number represents the potential “heat release” per unit area in the flaming zone, it can provide guidance to several important fire activities. It may also be considered a composite fuel moisture value as it reflects the contribution that all live and dead fuels have to potential fire intensity. It should also be pointed out that the ERC is a cumulative or “build-up” type of index. As live fuels cure and dead fuels dry, the ERC values get higher thus providing a good reflection of drought conditions. The scale is open-ended or unlimited and, as with other NFDRS components, is relative. Conditions producing an ERC value of 24 represent a potential heat release twice that of conditions resulting in an ERC value of 12.

As a reflection of its composite fuel moisture nature, the ERC becomes a relatively stable evaluation tool for planning decisions that might need to be made 24 to 72 hours ahead of an expected fire decision or action. Since wind does not enter into the ERC calculation, the daily variation will be relatively small. The 1000 hr time lag fuel moisture (TLFM) is a primary entry into the ERC calculation through its affect on both living and dead fuel moisture inputs. There may be a tendency to use the 1000 hr TLFM as a separate “index” for drought considerations. A word of caution – any use of the 1000 hr TLFM as a separate “index” must be preceded by an analysis of historical fire weather data to identify critical levels of 1000 hr TLFM. A better tool for measurement of drought conditions is the ERC since it considers both dead and lives fuel moistures.

Lightning Occurrence Index – (LOI) – The Lightning Occurrence Index is a numerical rating of the potential occurrence of lightning-caused fires. It is intended to reflect the number of lightning caused fires one could expect on any given day. The Lightning Occurrence is scaled such that a LOI value of 100 represents a potential of 10 fires per million acres. It is derived from a combination of Lightning Activity Level (LAL) and Ignition Component. To effectively develop this index the user must perform an extensive analysis to develop a local relationship between thunderstorm activity level and number of actual fire starts that result. Since our ability to accurately quantify thunderstorm intensity is limited it is difficult to develop a relationship between activity and fire starts. Thus the Lightning Occurrence Index is seldom used in fire management decisions. Local fire managers should however monitor the lightning activity level provided by the National Weather Service and with a little experience can develop their own rating of lightning fire potential.

Human Caused Fire Occurrence Index - (MCOI) – This is a numeric rating of the potential occurrence of human-caused fires. Similar to the Lightning Occurrence Index, this value is intended to reflect the number of human-caused fires one could expect on any given day. It is derived from a measure of daily human activity and its associated fire start potential, the human caused fire risk input, and the ignition component. The MCOI is scaled such that the number is equal to 10 times the number of fires expected that day per million acres. An index value of 20 represents a potential of 2 human caused fires per million acres that day if the fuel bed was receptive for ignition.

The original developers of the National Fire Danger Rating System recognized that “where the total fires per million acres average twenty or fewer, the evaluations are questionable”. This has been validated through application. As with the Lightning Occurrence Index, the Human-caused Fire Occurrence Index requires considerable analysis to establish a local relationship between the level of human activity and fire starts. Since human activity is fairly constant throughout the season and human-caused fire occurrence in, for example, the Pacific Northwest, is relatively low in terms of fires per million acres per day, most analyses result in very low risk inputs that don’t change much from day to day. Few fire managers, if any, are using this index in making day to day decisions.

*Burning Index (BI)* – The Burning Index is a number related to the contribution of fire behavior to the effort of containing a fire. The BI is derived from a combination of Spread and Energy Release Components. It is expressed as a numeric value closely related to the flame length in feet multiplied by 10. The scale is open ended which allows the range of numbers to adequately define fire problems, even in time of low to moderate fire danger. Table 1, adapted from Deeming et al (1977) gives several cross references that relate BI to fireline intensity and flame length with narrative comments relative to the affects on prescribed burning and fire suppression activities. It’s important to remember that computed BI values represent the near upper limit to be expected on the rating area. In other words, if a fire occurs in the worst fuel, weather and topography conditions of the rating area, these numbers indicate its expected fireline intensities and flame length.

Studies have indicated that difficulty of containment is not directly proportional to flame length alone but rather to fireline intensity, the rate of heat release per unit length of fireline, (Byram 1959). The use of fireline intensity as a measure of difficulty shows that the containment job actually increases more than twice as fast as BI values increase. It is still safe to say that flame length is related to fireline intensity because BI is based on flame length.

### 1.8.3 Burning Index/Fire Behavior Crosswalk (Table 1)

<u>BI-1978</u>	<u>Flame Length (ft)</u>	<u>Fireline Intensity (BTUs/S/ft)</u>	<u>Narrative Comments</u>
0-30	0-3	0-55	Most prescribed burns are conducted in this range.
30-40	3-4	55-110	Generally represent the limit of control for direct attack methods.
40-60	4-6	110-280	Machine methods usually necessary or indirect attack should be used.
60-80	6-8	280-520	The prospects for direct control by any means are poor above this intensity.
80-90	8-9	520-670	The heat load on people within 30 feet of the fire is dangerous.
90-110+	9+	670-1050+	Above this intensity, spotting, fire whirls, and crowning should be expected.



Fire Load Index (FLI) – Fire Load Index is a rating of the maximum effort required to contain all probable fires occurring within a rating area during the rating period. The FLI was designed to be the end product of the NFDRS – the basic preparedness or strength-of-force presuppression index for an administrative unit. It was to be used to set the readiness level for the unit. It focuses attention upon the total fire containment problem. Because the FLI is a composite of the various components and indexes of the NFDRS, including the local lighting and human caused fire risk inputs, the comparability of values varied significantly from one unit to another. To be useful managers must establish the relationship between the FLI calculated for their unit and the true fire containment effort needed. The FLI is represented as a number on a scale of 1-100. It provides no specific information as to the nature of the potential fire problem as individual indexes and components do. Because the Fire Load Index is a composite of several pieces of the NFDRS, its utility is impacted by of the inherent weaknesses of the individual components and indexes. Very few fire management decisions are made based on the Fire Load Index alone.

Keetch-Byram Drought Index (KBDI) - This index is not an output of the National Fire Danger Rating System itself but is often displayed by the processors used to calculate NFDRS outputs. KBDI is a stand-alone index that can be used to measure the affects of seasonal drought on fire potential. The actual numeric value of the index is an estimate of the amount of precipitation (in 100ths of inches) needed to bring the soil back to saturation (a value of 0 is complete saturation of the soil). Since the index only deals with the top 8 inches of the soil profile, the maximum KBDI value is 800 or 8.00 inches of precipitation would be needed to bring the soil back to saturation. The Keetch-Byram Drought Index's relationship to fire danger is that as the index value increases, the vegetation is subjected to increased stress due to moisture deficiency. At higher values desiccation occurs and live plant material is added to the dead fuel loading on the site. Also an increasing portion of the duff/litter layer becomes available fuel at higher index values.

If you are using the 1978 fuel models, KBDI values can be used in conjunction with the National Fire Danger Rating System outputs to aid decision making. If you are using the modified NFDRS fuel models that were developed in 1988, KBDI values are a required input to calculate daily NFDRS outputs.

Since most fire danger stations are not being operated when the soil is in a saturated condition, it is necessary to estimate what the KBDI value is when daily observations are began. The technical documentation describing the KVBDI includes methodology to estimate the initiating value is included in the attached reference list. Most processors include a default initiation value of 100.

## **1.9 – Application of NFDRS Outputs**

### **1.9.1 Determine Regional Preparedness Levels**

Daily, Geographic Area Coordination Centers must assess their readiness. Based on the expected fire activity, their actions may include pre-positioning existing resources to areas with the greatest fire potential; calling back off duty personnel; or ordering in back-up or contingency resources from outside the area. Each of these decisions can be very costly. Good, sound fire danger information to aid in the decision process is critical. To accomplish this the Pacific Northwest geographic area has been broken into seven Preparedness Areas representing areas of unique weather influences. Five to seven representative weather stations have been identified in each area and weighted NFDRS values are calculated daily for each Preparedness Area. This produces a spatial distribution of fire danger across the geographic area. Coordinators combine this information with the current and projected levels of resource commitment and other factors to determine if resource placement is sufficient to meet anticipated needs or if adjustments in staffing are needed. Similar processes are used by other coordination centers throughout the US.

### **1.9.2 Preplan Dispatch Actions**

Most units preplan their actions in response to reported incidents. Logic says that the higher the fire danger the more production units necessary to contain the start. The question is which component or index best reflects the local unit's response needs. Comparison of historic fire size with corresponding spread component, ignition component, ERC or BI can give assistance in making this selection.

Reviewing the definition of each can also give guidance as to the type of resource that might be effective in containing the fire. As an example, a local unit determines that spread component best corresponds to ultimate fire size. From their knowledge of the NFDRS they know that the spread component is forward rate of spread expressed in feet per minute. They also know how which resources they usually have available to them, how much fireline each can produce and how long it typically takes for a unit to get to an incident.

At some point available hand crews are no longer effective and engines, dozers or air tankers are appropriate. With this information you can determine how many response units are needed for various spread component value classes. A graduated initial response action can be developed based on local experience using NFDRS outputs. The Firefamily Plus software can compare fire size with various NFDRS indices and components.

### **1.9.3 Determine Daily Adjective Fire Danger Ratings**

In 1974, the Forest Service, Bureau of Land Management and State Forestry organizations established a standard adjective description for five levels of fire danger for use in public information releases and fire prevention signing. For this purpose only, fire danger is expressed using the adjective levels and color codes described below.

Fire Danger Class and Color Code	Description
Low (L) (Green)	Fuels do not ignite readily from small firebrands, although a more intense heat source such as lightning, may start fires in duff or punky wood. Fires in open cured grasslands may burn freely a few hours after rain, but woods fires spread slowly by creeping or smoldering, and burn in irregular fingers. There is little danger of spotting.
Moderate (M) (Blue)	Fires can start from most accidental causes, but with the exception of lightning fires in some areas, the number of starts is generally low. Fires in open cured grasslands will burn briskly and spread rapidly on windy days. Timber fires spread slowly to moderately fast. The average fire is of moderate intensity, although heavy concentrations of fuel, especially draped fuel, may burn hot. Short-distance spotting may occur, but is not persistent. Fires are not likely to become serious and control is relatively easy.
High (H) (Yellow)	All fine dead fuels ignite readily and fires start easily from most causes. Unattended brush and campfires are likely to escape. Fires spread rapidly and short-distance spotting is common. High-intensity burning may develop on slopes or in concentrations of fine fuels. Fires may become serious and their control difficult unless they are hit hard and fast while small.
Very High (VH) (Orange)	Fires start easily from all causes and, immediately after ignition, spread rapidly and increase quickly in intensity. Spot fires are a constant danger. Fires burning in light fuels may quickly develop high intensity characteristics such as long-distance spotting and fire whirlwinds when they burn in heavier fuels.
Extreme (E) (Red)	Fires start quickly, spread furiously, and burn intensely. All fires are potentially serious. Development into high intensity burning will usually be faster and occur from smaller fires than in the very high fire danger class. Direct attack is rarely possible and may be dangerous except immediately after ignition. Fires that develop headway in heavy slash or in conifer stands may be unmanageable while the extreme burning condition lasts. Under these conditions the only effective and safe control action is on the flanks until the weather changes or the fuel supply lessens.

The processors that calculate fire danger automatically calculate the adjective class rating using information provided by the user when establishing their weather station parameters. The adjective rating calculations are keyed off the priority one fuel model listed in your station record. It uses the staffing index, such as ERC or BI, the user associates with that first fuel mode/slope/grass type/climate class combination entered.

The actual determination of the daily adjective rating is based on the current or predicted value for a user selected staffing index and ignition component using the table below.

Staffing Levels	Adjective Fire Danger Rating				
1-, 1, 1+	L	L	L	M	M
2-, 2, 2+	L	M	M	M	H
3-, 3, 3+	M	M	H	H	VH
4-, 4, 4+	M	H	VH	VH	E
5	H	VH	VH	E	E
Ignition Component	0-20	21-45	46-65	66-80	81-100

#### 1.9.4 Support Severity Requests

Most agencies have some process whereby local units can request additional funding to supplement their basic funded presuppression organization. Criteria for approval of such requests usually requires supporting data to show that their current conditions are more severe than those anticipated during their planning efforts. One technique used by some is to compare selected current NFDRS components and indices with historic worst case and normal expected values for the corresponding dates. Seasonal patterns can also be shown using the historic data. Since these requests are usually in response to drought conditions Energy Release Component and 1000 hr time lag fuel moisture values are most frequently used. (FIRE FAMILY PLUS is a computer program available to generate and analyze historic trends of NFDRS values).

#### 1.9.5 Facilitate Briefings

One of the failures that has resulted in loss of life on several wildfires fires in recent years has been inadequate briefings as to expected conditions provided fire fighting personnel unfamiliar with the local area. In 1997, the National Advisory Group for Fire Danger Rating developed the “Fire Danger Rating Pocket Card for Firefighter Safety” as a tool to aid in these briefings. The card contains information relative to current conditions, seasonal trends, and comparisons with historic patterns. One of the objectives was to communicate using common terminology. The National Fire Danger Rating System serves that purpose. The terminology used in NFDRS has common meaning throughout the country. NFDRS outputs for the local area are displayed in a combined verbal, numeric and graphic format depicting current and historic values. In addition the card contains information about NFDRS components and indices associated with recent large fires that occurred in the local area; thresholds of critical fire behavior based on local experience; and local fire danger interpretations. All the information is presented on a single card that can be given to all personnel. The cards can be easily updated and produced locally using a PC based computer program. Users can download a template for constructing their local cards off the Internet by accessing the following site: <http://fire.blm.gov/nfdrs>

### **1.9.6 Calculate Daily Industrial Fire Precaution Level (IFPL)**

In the mid-70's fires originating from industrial operations represented a significant fire protection problem in the Pacific Northwest. An analysis of the issue was conducted to determine the best fire prevention strategy to apply. By plotting each industrial or equipment operation related fire against the Ignition and Energy Release Component for the day corresponding to the start of fire and by recording the ultimate size class, a relationship was established between the observed NFDRS components and final fire size. (Since actual NFDRS fuel model information had not been recorded, each fire that occurred on the East side of the Cascades was assumed to have occurred in the NFDRS "C" fuel model and those that occurred on the West side were assumed to be in NFDRS fuel model "G"). As expected, it was readily observed that the higher the Ignition Component, the more frequent the fire starts; and the higher the Energy Release Component, the larger the fires. These relationships were converted into mathematical equations and are used today to calculate the daily Industrial Fire Precaution Level, a graduated scale of restrictions used by most agencies in the Pacific Northwest to regulate industrial operations. In the 20 years that the IFPL system has been in place, there has been a significant reduction in industrial related fires in all jurisdictions.

### **1.9.7 Guide Public Use Restrictions**

A similar problem exists in determining when to initiate public use restrictions. Again a local analysis of conditions associated with human caused fire occurrence is needed. By establishing a relationship between specific types of human caused fire starts such as smoking or campfires, with a NFDRS component or index, and monitoring current trend of those components or indexes, one can target and time the implementation of specific public use restrictions. The NFDRS Ignition Component can assist in that decision. As an example a unit may find that campfires start becoming a problem when IC values regularly exceed 40. By monitoring the seasonal trend of IC values the manager can easily project when to implement campfire restrictions. The FIRES program mentioned above can aid in this analysis.

### **1.9.8 Assist in Wildland Fire Use Go-No Go Decisions**

The decision to allow an ignition to burn under prescribed conditions rather than take suppression action is not without serious risk or consequence. Managers need to use all the tools available to aid in this critical decision. Analysis of current NFDRS components and indexes and their historic trends and patterns can aid in this decision process. Spread and Energy Release Components are used most frequently. By looking at today's values and comparing them with the average, most likely and worst values historically experienced for the period as well as examining the expected seasonal trend one can start developing a comfort level with their decision. If your selected component is already at historic highs for the year and you still have a significant portion of the drying season to go through, the decision will be much different than if your current values are below seasonal averages and you are near the end of the season. Again NFDRS outputs are just one tool to assist the manager in making the best decision possible.

## 1.10 Operations

### 1.10.1 Seasonal Start Up

Automatic weather stations report hourly observations every day of the year unless shut down for environmental reasons (e.g. snow, unfavorable freezing conditions). At a minimum these observations should be collected for NFDRS calculations and archived in NIFMID at least 30 days prior to the start of vegetative growth, or greenup, described below. The equations that predict 1000-hr and live fuel moisture contents require at least 4 weeks to stabilize and predict accurate fuel moisture content values.

### 1.10.2 Greenup

Greenup is defined as the beginning of a new cycle of plant growth. Greenup usually occurs once a year, except in desert areas where rainy periods can produce a flush of new growth more than once a year. Greenup may be signaled at different dates for different fuel models. For any particular model, greenup should be declared when the annual and perennial herbaceous vegetation starts to grow or the leaves of deciduous shrubs and begin to appear within the area represented by the fuel model. Don't start green-up when the first flush of green occurs in the area. You should wait to start green-up until the majority of the vegetation that will ultimately become your fire problem when it matures and cures starts to grow.

If using 1978 NFDRS fuel models, the NFDRS processor assumes a length of this greenup period according to climate class.

Climate Class	Days in Greenup Period
1	7
2	14
3	21
4	28

For example, if greenup is declared May 5 for a fuel model at a weather station in climate class 3, it is assumed a large portion of the new growth will have occurred by May 26. At completion of greenup, fire danger should be significantly reduced for fuel models with a high proportion of live woody and or herbaceous fuel loads.

### 1.10.3 A Suggested Timetable for 1978 Herbaceous Stage

<b>Situation or Plant Growth Phase</b>	<b>Changes you make</b>	<b>Changes the model makes for you</b>
Approximately 30 days prior to Greenup	Pregreen	
New season's growth occurs	Greenup	
Herbaceous fuel moisture down to 120%		Transition
Herbaceous fuel moisture down to 30%		Cured
Freeze or Dormancy	Frozen	
Approximately 30 days prior to Greenup	Pregreen	
And so on		

### 1.10.4 A Suggested Timetable for 1988 Season Codes and Greenness Factors

<b>Situation or Plant Growth Phase</b>	<b>Season Codes</b>	<b>Greenness Factors</b>
Herbaceous fuels cured; shrubs fully dormant	Winter=1	Herb: 0 Woody: 0
New season's growth occurs	Spring=2	Increase each separately according to their growth, to a maximum of 20
Herbaceous growth flush is complete	Summer=3	Change each separately according to their growth
Shrubs enter dormancy	Fall=4	Reduce each separately according to their growth, down to 0
And so on		

For more details on season codes and greenness factors see Appendix VIII.

### **1.10.5 Continuity**

Continuity refers to two characteristics of data:

1. A record of continuous hourly and daily observations at a site to include the entire year if possible or at least the normal fire suppression and fire use seasons.
2. Many years of data from one observation site.

Every effort must be made to provide for continuity in the weather database.

NFDRS applications which produce daily assessments of burning conditions require daily continuity because several of the NFDRS calculations are dependant on values calculated the previous day.

Climatological applications that produce probabilistic information require continuity of the records (e.g., Long term risk assessment, FARSITE, FireFamily Plus, climate forecasts, NFMAS, fire potential assessments) if they are to have any statistical validity.

### **1.10.6 Quality Control**


Fire danger ratings are no better than the data used to derive them. If fire danger ratings are to be used with confidence, uniform standards and procedures must be correctly followed. Other uses of the climatological database also require that data are accurate.

Quality control is recognized as an integral part of the fire danger rating system application.




## 2.0 Figures

### 2.0.1 Figure 1 - National Fire Danger Rating System Structure

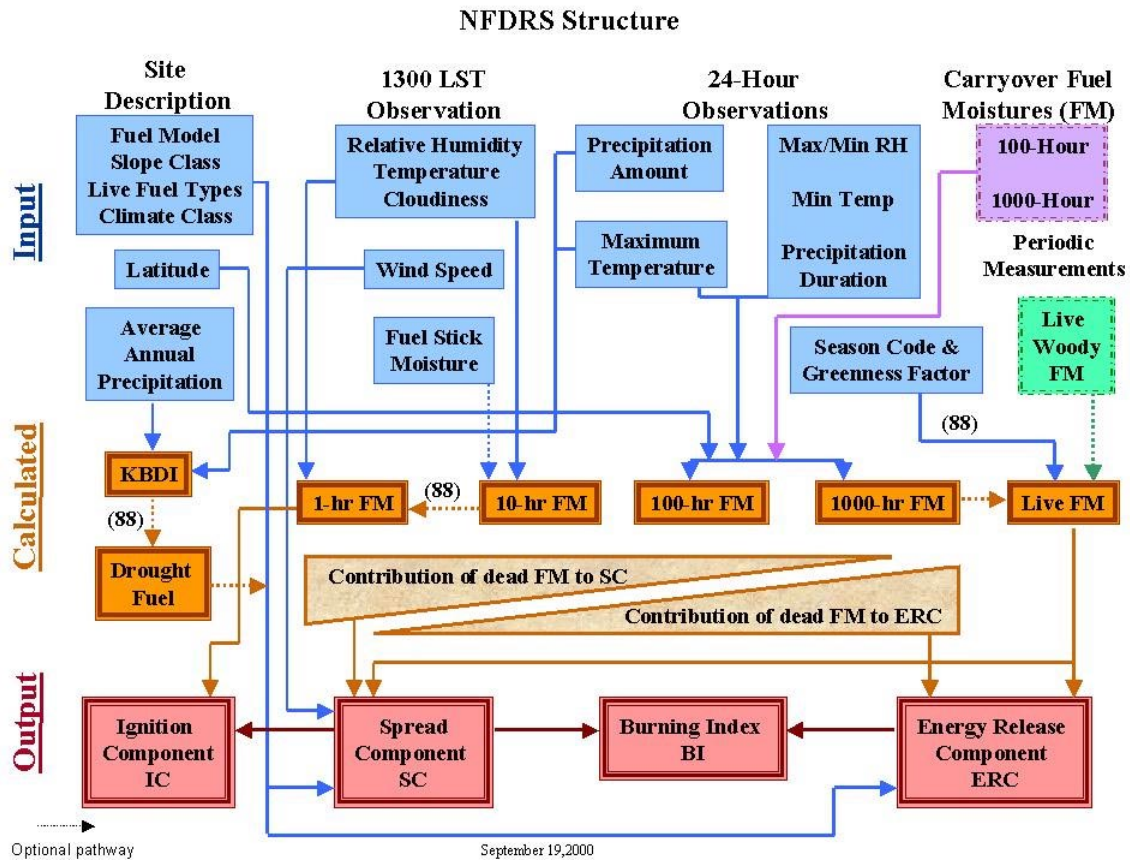

**2.0.2 Figure 2 - Flow of Information In and Around the NFDRS Processor**

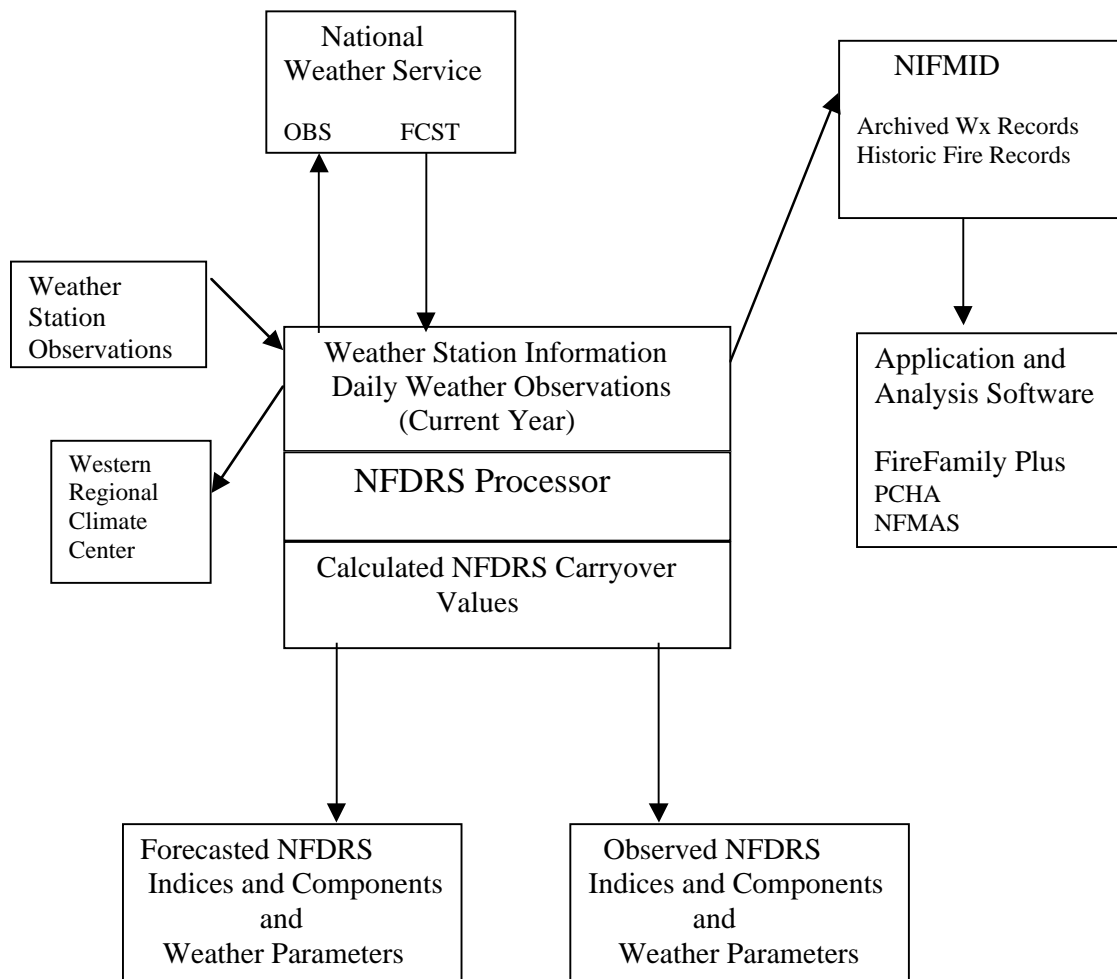

## 2.1 - APPENDICES

### 2.1.1 - Appendix I—Fuel Model Selection Key

I. Mosses, lichens, and low shrubs predominate ground fuels		
A. An overstory of conifers occupies more than one third of site		Model Q
B. There is no overstory or it occupies less than one-third of the site		Model S
II. Marsh grasses and/ or reeds predominate		Model N
III. Grasses and/ or forbs predominate		
A. There is an open overstory of conifer and/or hardwoods		Model C
B. There is no overstory		
1. Woody shrubs occupy more than one-third, but less than two-thirds of the site		Model T
2. Woody shrubs occupy less than two thirds of the site		
a. The grasses and forbs are primarily annuals		Model A
b. The grasses and forbs are primarily perennials		Model L
IV. Brush, shrubs, tree reproduction or dwarf tree species predominate		
A. The average height of woody plants is 6 ft. or greater		
1. Woody plants occupy two-thirds or more of the site		
a. One-fourth or more of the woody foliage is dead		
1) Mixed California chaparral		Model B
2) Other types of brush		Model F
b. Up to one-fourth of the woody foliage is dead		Model Q
c. Little dead foliage		Model O
2. Woody plants occupy less than two-thirds of the site		Model F
B. Average height of woody plants is less than 6 ft.		
1. Woody plants occupy two-thirds or more of the site		
a. Western United States		Model F

- b. Eastern United States Model O
- 2. Woody plants occupy less than two-thirds but greater than one third of the site
  - a. Western United States Model T
  - b. Eastern United States Model D
- 3. Woody plants occupy less than one-third of the site
  - a. The grasses and forbs are primarily annuals Model A
  - b. The grasses and forbs are primarily perennials Model L

## V. Trees predominate

### A. Deciduous broadleaf species predominate

- 1. The area has been thinned or partially cut leaving slash as the major fuel component Model K
- 2. The area has not been thinned or partially cut
  - a. The overstory is dormant; leaves have fallen Model E
  - b. The overstory is in full leaf Model R

### B. Conifer species predominate

- 1. Lichens, mosses, and low shrubs dominate as understory fuels Model Q
- 2. Grasses and forbs are the primary ground fuel Model C
- 3. Woody shrubs and/or reproduction dominate as understory fuels
  - a. The understory burns readily
    - 1) Western United States Model T
    - 2) Eastern United States
      - a) The understory is more than 6 feet tall Model O
      - b) The understory is less than 6 feet tall Model D
  - b. The understory seldom burns Model H
- 4. Duff and litter, branch wood and tree boles are the primary ground fuel
  - a. The overstory is over mature and decadent; there

is a heavy accumulation of dead debris

Model G

b. The overstory is not decadent; there is only a nominal accumulation of debris

1) Needles are 2 inches or more in length (most pines)

a) Eastern United States

Model P

b) Western United States

Model U

2) The needles are less than 2 inches long

Model H

VI. Slash is the predominate fuel type

A. The foliage is still attached; there has been little settling

1. The loading is 25 tons/acre or greater

Model I

2. The loading is less than 25 t/ac but greater than 15 t/ac

Model J

3. The loading is less than 15 tons/acre

Model K

B. Settling is evident; the foliage is falling off; grasses, forbs and shrubs are invading

1. The loading is 25 tons/acre or greater

Model J

2. The loading is less than 25 tons per acre

Model K

**NOTES**

## 2.1.2 - Appendix II—Narrative Fuel Model Descriptions

The following descriptions of the various NFDRS fuel models are taken from Deeming et al (1977) (See Section 3.0 References).

**Fuel Model A** – This fuel model represents western grasslands vegetated by annual grasses and forbs. Brush or trees may be present but are very sparse, occupying less than one-third of the area. Examples of types where Fuel Model A should be used are cheatgrass and mudusa head. Open pinyon-juniper, sagebrush-grass, and desert shrub associations may appropriately be assigned this fuel model if the woody plants meet the density criteria. The quantity and continuity of the ground fuels vary greatly with rainfall from year to year.

**Fuel Model B** – Mature, dense fields of brush 6 feet or more in height are represented by this fuel model. One-fourth or more of the aerial fuel in such stands is dead. Foliage burns readily. Model B fuels are potentially very dangerous, fostering intense, fast-spreading fires. This model is for California mixed chaparral, generally 30 years or older. The F model is more appropriate for pure chamise stands. The B model may also be used for the New Jersey pine barrens.

**Fuel Model C** – Open pine stands typify Model C fuels. Perennial grasses and forbs are the primary ground fuel but there is enough needle litter and branch wood present to contribute significantly to the fuel loading. Some brush and shrubs may be present but they are of little consequence. Types covered by Fuel Model C are open, longleaf, slash, ponderosa, Jeffery, and sugar pine stands. Some pinyon-juniper stands may qualify.

**Fuel Model D** – This fuel model is specifically for the palmetto-gallberry understory-pine association of the southeast coastal plains. It can also be used for the so-called “low pocosins” where Fuel Model O might be too severe. This model should only be used in the Southeast because of the high moisture of extinction associated with it.

**Fuel Model E** – Use this model after fall leaf fall for hardwood and mixed hardwood-conifer types where the hardwoods dominate. The fuel is primarily hardwood leaf litter. The oak-hickory types are best represented by Fuel Model E but E is an acceptable choice for northern hardwoods and mixed forests of the Southeast. In high winds, the fire danger may be underrated because rolling and blowing leaves are not accounted for. In the summer after the trees have leafed out, Fuel Model E should be replaced by Fuel Model R.

**Fuel Model F** – Fuel Model F represents mature closed chamise stands and oak brush fields of Arizona, Utah, and Colorado. It also applies to young, closed stands and mature, open stands of California mixed chaparral. Open stands of pinyon-juniper are represented; however, fire activity will be overrated at low wind speeds and where there is sparse ground fuels.

**Fuel Model G** – Fuel Model G is used for dense conifer stands where there is a heavy accumulation of litter and down woody material. Such stands are typically over mature and may also be suffering insect, disease, wind or ice damage—natural events that create

a very heavy buildup of dead material on the forest floor. The duff and litter are deep and much of the woody material is more than 3 inches in diameter. The undergrowth is variable, but shrubs are usually restricted to openings. Types meant to be represented by Fuel Model G are hemlock-Sitka spruce, Coastal Douglas-fir, and wind thrown or bug-killed stands of lodgepole pine and spruce.

Fuel Model H – The short needled conifers (white pines, spruces, larches, and firs) are represented by Fuel Model H. In contrast to Model G fuels, Fuel Model H describes a healthy stand with sparse undergrowth and a thin layer of ground fuels. Fires in the H fuels are typically slow spreading and are dangerous only in scattered areas where the downed woody material is concentrated.

Fuel Model I – Fuel Model I was designed for clear-cut conifer slash where the total loading of materials less than 6 inches in diameter exceeds 25 tons/acre. After settling and the fines (needles and twigs) fall from the branches, Fuel Model I will overrate the fire potential. For lighter loadings of clear-cut conifer slash, use Fuel Model J and for light thinnings and partial cuts where the slash is scattered under a residual overstory, use Fuel Model K.

Fuel Model J – This model complements Fuel Model I. It is for clear-cuts and heavily thinned conifer stands where the total loading of material less than 6 inches in diameter is less than 25 tons per acre. Again as the slash ages, the fire potential will be overrated.

Model K – Slash fuels from light thinnings and partial cuts in conifer stands are represented by Fuel Model K. Typically the slash is scattered about under an open overstory. This model applies to hardwood slash and to southern pine clear-cuts where loading of all fuels is less than 15 tons/ acre.

Fuel Model L – This fuel model is meant to represent western grasslands vegetated by perennial grasses. The principal species are coarser and the loadings heavier than those in Model A fuels. Otherwise the situations are very similar; shrubs and trees occupy less than one-third of the area. The quantity of fuels in these areas is more stable from year to year. In sagebrush areas Fuel Model T may be more appropriate.

There is no Fuel Model M.

Fuel Model N – This fuel model was constructed specifically for the sawgrass prairies of south Florida. It may be useful in other marsh situations where the fuel is coarse and reedlike. This model assumes that one-third of the aerial portion of the plants is dead. Fast-spreading, intense fires can occur over standing water.

Fuel Model O – The O fuel model applies to dense, brush like fuels of the Southeast. O fuels, except for a deep litter layer, are almost entirely living in contrast to B fuels. The foliage burns readily except during the active growing season. The plants are typically over 6 feet tall and are often found under open stands of pine. The high pocosins of the Virginia, North and South Carolina coasts are the ideal of Fuel Model O. If the plants do not meet the 6-foot criteria in those areas, Fuel Model D should be used.



Fuel Model P – Closed, thrifty stands of long-needled southern pines are characteristic of P fuels. A 2 to 4 inch layer of lightly compacted needle litter is the primary fuel. Some small diameter branchwood is present but the density of the canopy precludes more than a scattering of shrubs and grass. Model P has the high moisture of extinction characteristic of the Southeast. The corresponding model for other long-needled pines is H.

Fuel Model Q – Upland Alaska black spruce is represented by Fuel Model Q. The stands are dense but have frequent openings filled with usually inflammable shrub species. The forest floor is a deep layer of moss and lichens, but there is some needle litter and small diameter branchwood. The branches are persistent on the trees, and ground fires easily reach into the crowns. This fuel model may be useful for jack pine stands in the Lake States. Ground fires are typically slow spreading, but a dangerous crowning potential exists. Users should be alert to such events and note those levels of SC and BI when crowning occurs.

Fuel Model R – This fuel model represents the hardwood areas after the canopies leave out in the spring. It is provided as the off-season substitute for Fuel Model E. It should be used during the summer in all hardwood and mixed conifer-hardwood stands where more than half of the overstory is deciduous.

Fuel Model S – Alaskan and alpine tundra on relatively well drained sites fit this fuel model. Grass and low shrubs are often present, but the principal fuel is a deep layer of lichens and moss. Fires in these fuels are not fast spreading or intense, but are difficult to extinguish.

Fuel Model T – The bothersome sagebrush-grass types of the Great Basin and the Intermountain West are characteristic of T fuels. The shrubs burn easily and are not dense enough to shade out grass and other herbaceous plants. The shrubs must occupy at least one-third of the site or the A or L fuel models should be used. Fuel Model T might be used for immature scrub oak and desert shrub associations in the West and the scrub oak-wire grass type of the Southeast.

Fuel Model U – This fuel model represents the closed stands of western long-needled pines. The ground fuels are primarily litter and small branchwood. Grass and shrubs are precluded by the dense canopy but may occur in the occasional natural opening. Fuel Model U should be used for ponderosa, Jeffery, sugar pine stands of the west and red pine stands of the Lake States. Fuel Model P is the corresponding model for southern pine plantations.

**NOTES**

## 2.1.3 – Appendix III – Fuel Model Properties

### 2.1.3.1 -- Grass Fuel Models

1978 NFDRS FUEL MODEL PROPERTIES						
Grass Fuel Models						
Parameter	A	C	L	N	S	T
Fuel Loading (tons/acre)						
0 to _ inch	0.2	0.4	0.25	1.5	0.5	1.0
_ to 1 inch		1.0		1.5	0.5	0.5
1 to 3 inch					0.5	
3 to 8 inch					0.5	
Live Woody		0.5		2.0	0.5	2.5
Herbaceous	0.3	0.8	0.5		0.5	0.5
Fuel Bed Depth (ft)	0.8	0.75	1.0	3.0	0.4	1.25
Moisture of Extinction (%)						
Dead	15	20	15	25	25	15
Surface to Area Volume Ration (sq.ft/cu.ft)						
0 to _ inch	3,000	2,000	2,000	1,600	1,500	2,500
_ to 1 inch		109		109	109	109
1 to 3 inch					30	
3 to 8 inch					8	
Live Woody		1,500		1,500	1,200	1,500
Herbaceous	3,000	2,500	2,000		1,500	2,000
Heat Content (all fuels)						
BTUs/lb	8,000	8,000	8,000	8,700	8,000	8,000
Wind Adjustment Factor	0.6	0.4	0.6	0.6	0.6	0.6
SCmax	301	32	178	167	17	96
Constant fuel particle values used for all fuel models:						
	Particle Density			32 lb./cu.ft.		
	Total Mineral Content:			5.55%		
	Effective Mineral Content:			1%		

1988 NFDRS FUEL MODEL PROPERTIES						
Grass Fuel Models						
Parameter	A	C	L	N	S	T
Fuel Loading (tons/acre)						
0 to _ inch	0.2	0.4	0.25	1.5	0.5	1.0
_ to 1 inch		1.0		1.5	0.5	0.5
1 to 3 inch					0.5	
3 to 8 inch					0.5	
Live Woody		<b>0.8</b>		2.0	0.5	2.5
Herbaceous	0.3	0.8	0.5		0.5	0.5
Fuel Bed Depth (ft)	0.8	0.75	1.0	3.0	0.4	1.25
<b>Drought Fuels</b>	<b>0.2</b>	<b>1.8</b>	<b>0.25</b>	<b>2.0</b>	<b>1.5</b>	<b>1.0</b>
Moisture of Extinction (%)						
Dead	15	20	15	<b>40</b>	25	15
Surface to Area Volume Ration (sq.ft/cu.ft)						
0 to _ inch	3,000	2,000	2,000	1,600	1,500	2,500
_ to 1 inch		109		109	109	109
1 to 3 inch					30	
3 to 8 inch					8	
Live Woody		1,500		1,500	1,200	1,500
Herbaceous	3,000	2,500	2,000		1,500	2,000
Heat Content (all fuels)						
BTUs/lb	8,000	8,000	8,000	8,700	8,000	8,000
<b>Wind Adjustment Factor</b>						
<b>Minimum</b>	<b>0.6</b>	<b>0.3</b>	<b>0.5</b>	<b>0.5</b>	<b>0.6</b>	<b>0.6</b>
<b>Maximum</b>	<b>0.6</b>	<b>0.5</b>	<b>0.5</b>	<b>0.5</b>	<b>0.6</b>	<b>0.6</b>
SCmax	301	32	178	167	17	96
Constant fuel particle values used for all fuel models:						
	Particle Density			32 lb./cu.ft.		
	Total Mineral Content:			5.55%		
	Effective Mineral Content:			1%		

### 2.1.3.2 Brush Fuel Models

1978 NFDRS FUEL MODEL PROPERITES					
Brush Fuel Models					
Parameter	B	D	F	O	Q
0 to _ inch	3.5	2.0	2.5	2.0	2.0
_ to 1 inch	4.0	1.0	2.0	3.0	2.5
1 to 3 inch	0.5		1.5	3.0	2.0
3 to 8 inch				2.0	1.0
Live Woody	11.5	3.0	9.0	7.0	4.0
Herbaceous		.75			0.5
Fuel Bed Depth (ft)	4.5	2.0	4.5	4.0	3.0
Moisture of Extinction (%)					
Dead	15	30	15	30	25
Surface Area to Volume Ration (sq.ft/cu.ft)					
0 to _ inch	700	1,250	700	1,500	1,500
_ to 1 inch	109	109	109	109	109
1 to 3 inch	30		30	30	30
3 to 8 inch				8	8
Live Woody	1,250	1,500	1,250	1,500	1,200
Herbaceous		1,500			1,500
Heat Content (all fuels)					
BTUs/lb	9,500	9,000	9,500	9,000	8,000
Wind Adjustment Factor	0.5	0.4	0.5	0.5	0.4
SCmax	58	68	24	99	59
Constant fuel particle values for all fuels:					
	Particle Density			32 lb./cu.ft.	
	Total Mineral Content:			5.55%	
	Effective Mineral Content:			1%	

1988 NFDRS FUEL MODEL PROPERTIES					
Brush Fuel Models					
Parameter	B	D	F	O	Q
0 to _ inch	3.5	2.0	2.5	2.0	2.0
_ to 1 inch	4.0	1.0	2.0	3.0	2.5
1 to 3 inch	0.5		1.5	3.0	2.0
3 to 8 inch				2.0	1.0
Live Woody	11.5	3.0	9.0	7.0	4.0
Herbaceous		.75			0.5
<b>Drought Fuels</b>	<b>3.5</b>	<b>1.5</b>	<b>2.5</b>	<b>3.5</b>	<b>3.5</b>
Fuel Bed Depth (ft)	4.5	2.0	4.5	4.0	3.0
Moisture of Extinction (%)					
Dead	15	30	15	30	25
Surface Area to Volume Ration (sq.ft/cu.ft)					
0 to _ inch	700	1,250	700	1,500	1,500
_ to 1 inch	109	109	109	109	109
1 to 3 inch	30		30	30	30
3 to 8 inch				8	8
Live Woody	1,250	1,500	1,250	1,500	1,200
Herbaceous		1,500			1,500
Heat Content (all fuels)					
BTUs/lb	9,500	9,000	9,500	9,000	8,000
<b>Wind Adjustment Factor</b>					
<b>Minimum</b>	<b>0.5</b>	<b>0.4</b>	<b>0.5</b>	<b>0.5</b>	<b>0.2</b>
<b>Maximum</b>	<b>0.5</b>	<b>0.4</b>	<b>0.5</b>	<b>0.5</b>	<b>0.3</b>
SCmax	58	68	24	99	59
Constant fuel particle values for all fuels:					
	Particle Density			32 lb./cu.ft.	
	Total Mineral Content:			5.55%	
	Effective Mineral Content:			1%	

### 2.1.3.3 – Timber Fuel Models

1978 NFDRS FUEL MODEL PROPERTIES						
Timber Fuel Models						
Parameter	E	G	H	P	R.	U
0 to _ inch	1.5	2.5	1.5	1.0	0.5	1.5
_ to 1 inch	0.5	2.0	1.0	1.0	0.5	1.5
1 to 3 inch	0.25	5.0	2.0	0.5	0.5	1.0
3 to 8 inch		12.0	2.0			
Live Woody	0.5	0.5	0.5	0.5	0.5	0.5
Herbaceous	0.5	0.5	0.5	0.5	0.5	0.5
Fuel Bed Depth (ft)	4.0	1.0	0.3	0.4	0.25	0.5
Moisture of Extinction (%)						
Dead	25	25	20	30	25	20
Surface Area to Volume Ration (sq.ft/cu.ft)						
0 to _ inch	2,000	2,000	2,000	1,750	1,500	1,750
_ to 1 inch	109	109	109	109	109	109
1 to 3 inch	30	30	30	30	30	30
3 to 8 inch		8	8			
Live Woody	1,500	1,500	1,500	1,500	1,500	1,500
Herbaceous	2,000	2,000	2,000	2,000	2,000	2,000
Heat Content (all fuels)						
BTUs/lb	8,000	8,000	8,000	8,000	8,000	8,000
Wind Adjustment Factor	0.5	0.4	0.4	0.4	0.4	0.4
Scmax	25	30	8	14	6	16
Constant fuel particle values for all fuels:						
	Particle Density			32 lb./cu.ft.		
	Total Mineral Content:			5.55%		
	Effective Mineral Content:			1%		

1988 NFDRS FUEL MODEL PROPERTIES						
Timber Fuel Models						
Parameter	E	G	H	P	R.	U
0 to _ inch	<b>1.0</b>	2.5	1.5	1.0	0.5	1.5
_ to 1 inch	0.5	2.0	1.0	1.0	0.5	1.5
1 to 3 inch	0.25	5.0	2.0	0.5	0.5	1.0
3 to 8 inch		12.0	2.0			
Live Woody	<b>1.0</b>	0.5	0.5	0.5	0.5	0.5
Herbaceous	0.5	0.5	0.5	0.5	0.5	0.5
<b>Drought Fuels</b>	<b>1.5</b>	<b>5.0</b>	<b>2.0</b>	<b>1.0</b>	<b>0.5</b>	<b>2.0</b>
Fuel Bed Depth (ft)	4.0	1.0	0.3	0.4	0.25	0.5
Moisture of Extinction (%)						
Dead	25	25	20	30	25	20
Surface Area to Volume Ration (sq.ft/cu.ft)						
0 to _ inch	2,000	2,000	2,000	1,750	1,500	1,750
_ to 1 inch	109	109	109	109	109	109
1 to 3 inch	30	30	30	30	30	30
3 to 8 inch		8	8			
Live Woody	1,500	1,500	1,500	1,500	1,500	1,500
Herbaceous	2,000	2,000	2,000	2,000	2,000	2,000
Heat Content (all fuels)						
BTUs/lb	8,000	8,000	8,000	8,000	8,000	8,000
<b>Wind Adjustment Factor</b>						
<b>Minimum</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>
<b>Maximum</b>	<b>0.5</b>	<b>0.3</b>	<b>0.3</b>	<b>0.3</b>	<b>0.5</b>	<b>0.3</b>
SCmax	25	30	8	14	6	16
Constant fuel particle values for all fuels:						
	Particle Density			32 lb./cu.ft.		
	Total Mineral Content:			5.55%		
	Effective Mineral Content:			1%		



### 2.1.3.4 Slash Fuel Models

1978 FUEL MODEL PROPERTIES			
Slash Fuel Models			
Parameter	I	J	K
Fuel Loading (tons/acre)			
0 to _ inch	12.0	7.0	2.5
_ to 1 inch	12.0	7.0	2.5
1 to 3 inch	10.0	6.0	2.0
3 to 8 inch	12.0	5.5	2.5
Live Woody			
Herbaceous			
Fuel Bed Depth (ft)	2.0	1.3	0.6
Moisture of Extinction (%)			
Dead	25	25	25
Surface Area to Volume Ratio (sq.ft/cu.ft)			
0 to _ inch	1,500	1,500	1,500
_ to 1 inch	109	109	109
1 to 3 inch	30	30	30
3 to 8 inch	8	8	8
Live Woody			
Herbaceous			
Heat Content (all fuels)			
BTUs/lb	8,000	8,000	8,000
Wind Adjustment Factor	0.5	0.5	0.5
Scmax	65	44	23
Constant fuel particle values for all fuels			
Particle Density	32 lbs/cu.ft		
Total Mineral Content	5.55%		
Effective Mineral Content	1%		


1988 FUEL MODEL PROPERTIES			
Slash Fuel Models			
Parameter	I	J	K
Fuel Loading (tons/acre)			
0 to _ inch	12.0	7.0	2.5
_ to 1 inch	12.0	7.0	2.5
1 to 3 inch	10.0	6.0	2.0
3 to 8 inch	12.0	5.5	2.5
Live Woody			
Herbaceous			
<b>Drought Fuels</b>	<b>12.0</b>	<b>7.0</b>	<b>2.5</b>
Fuel Bed Depth (ft)	2.0	1.3	0.6
Moisture of Extinction (%)			
Dead	25	25	25
Surface Area to Volume Ratio (sq.ft/cu.ft)			
0 to _ inch	1,500	1,500	1,500
_ to 1 inch	109	109	109
1 to 3 inch	30	30	30
3 to 8 inch	8	8	8
Live Woody			
Herbaceous			
Heat Content (all fuels)			
BTUs/lb	8,000	8,000	8,000
<b>Wind Adjustment Factor</b>			
<b>Minimum</b>	<b>0.5</b>	<b>0.5</b>	<b>0.5</b>
<b>Maximum</b>	<b>0.5</b>	<b>0.5</b>	<b>0.5</b>
Scmax	65	44	23
Constant fuel particle values for all fuels			
Particle Density	32 lbs/cu.ft		
Total Mineral Content	5.55%		
Effective Mineral Content	1%		

## 2.1.4 - Appendix IV—Climate Class Determination

### 2.1.4.1 – Climate Class Selection Guide

NFDRS Climate Class	Thornthwaite Humidity Province	Characteristic Vegetation	Regions
1	Arid	Desert (sparse grass and scattered shrubs)	Sonoran deserts of west Texas, New Mexico, southwest Arizona, southern Nevada, and western Utah; and the Mojave Desert of California.
1	Semiarid	Steppe (short grass and shrubs)	The short grass prairies of the Great Plains; the sagebrush steppes and pinyon/juniper woodlands of Wyoming, Montana, Idaho, Colorado, Utah, Arizona, Washington, and Oregon; and the grass steppes of the central valley of California.
2	Sub-humid (rainfall deficient in summer)	Savanna (grasslands, dense brush and open conifer forests)	The Alaskan interior; the chaparral of Colorado, Arizona, New Mexico, the Sierra Nevada foothills, and southern California; oak woodlands of California; ponderosa pine woodlands of the West; the mountain valleys (or parks) of the Northern and Central Rockies.
3	Sub-humid (rainfall adequate in all seasons)	Savanna (grasslands and open hardwood forests)	Blue stem prairies and blue stem-oak hickory savannas of Iowa, Missouri and Illinois.
3	Humid	Forests	Almost the entire eastern United States; and those higher elevations in the West that support dense forests.
4	Wet	Rain forests (redwoods, and spruce-cedar-hemlock)	Coast of northern California, Oregon, Washington, and southeast Alaska.

### 2.1.4.2 Climate Class Map

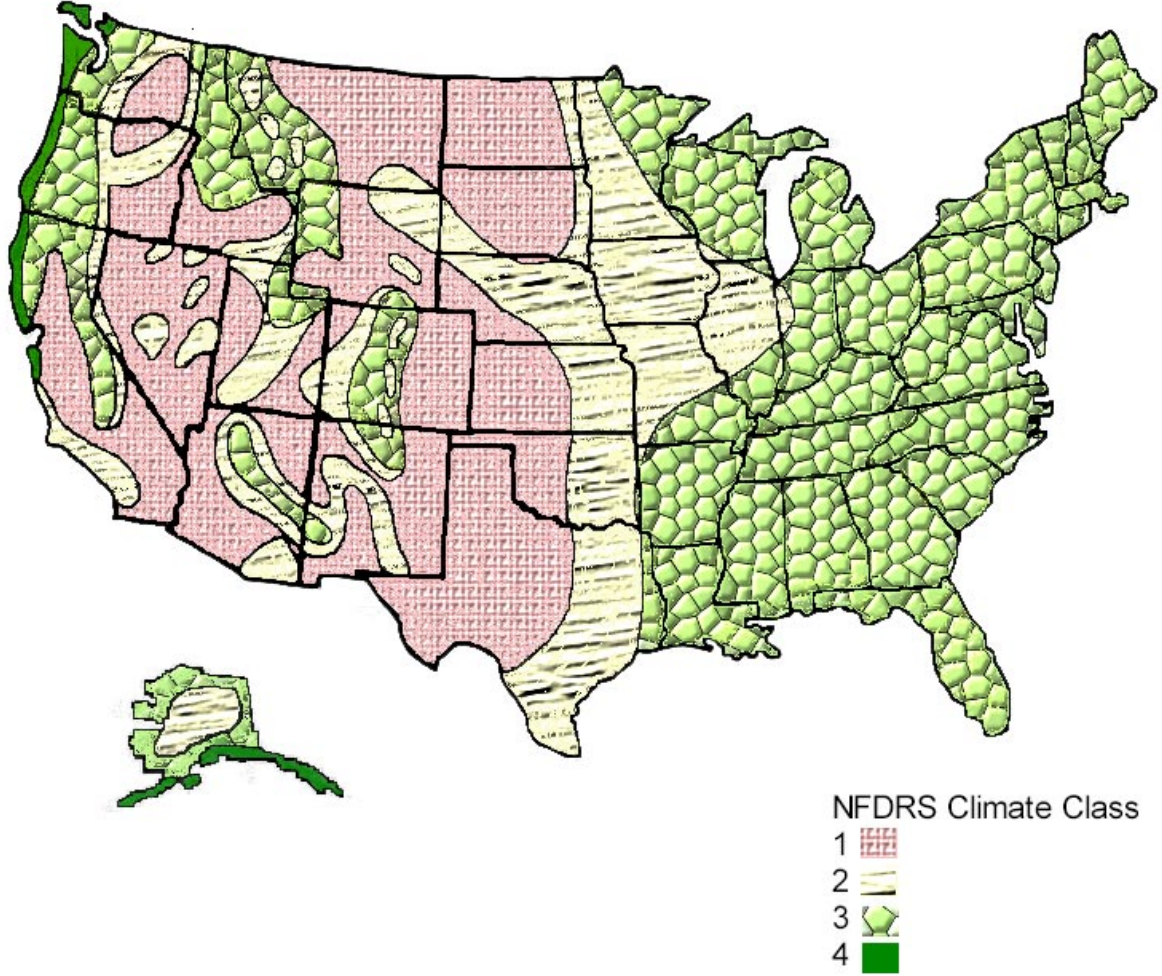

## 2.1.5 - Appendix V—Weather Data Requirements

The reliability and accuracy of the outputs of the National Fire Danger Rating System are predicated on consistent daily weather observations of high quality. This includes using standard equipment that is regularly maintained. More often than not the problems units have with the National Fire Danger Rating System producing outputs that are not representative of their local conditions can be traced back to the weather observations. The following is a listing of the various weather parameters used by the National Fire Danger Rating System. All observations are taken at or near 1300 hr local standard time (or 1400 hr local daylight savings time). Most NFDRS processors adjust metric measurements to English measurements. A good reference for maintenance of quality weather observations is the *Weather Station Handbook – An Interagency Guide to Wildland Fire Managers* (Finklin and Fischer 1990).

*Dry Bulb Temperature (DBT)* – The temperature of the air measured in the shade 4 \_ feet above the ground.

*Relative Humidity (RH)* – The ratio of the actual amount of water vapor in the air to the amount necessary to saturate the air at that temperature and pressure. It is expressed as a percentage. Automated weather stations measure this parameter directly. Manual stations derive the value from wet and dry bulb temperature measurements taken with a psychrometer and applied to National Weather Service psychrometric tables applicable to the elevation where the observations were taken.

*Dew Point* – The temperature at which a parcel of air being cooled reaches saturation (100 percent relative humidity). Dew point is an alternate entry to relative humidity and is derived in the same manner as RH using psychrometric tables.

*Wind Speed (WS)* – Wind, in miles per hour, measured at 20 feet above the ground or the average height of the vegetative cover and averaged over at least 10 minutes. Refer to the *Weather Station Handbook* for procedures to adjust measurement height to account for surrounding vegetation.

*Wind Direction* – The direction from which the wind is blowing. It is entered as either an alphabetic value (N for north, SE for southeast, etc) or a numeric value representing the compass direction (90 for east, 315 for winds coming out of the northwest). Calm, associated with a zero wind speed, is entered as a 0 for wind direction. Wind direction does not enter into any NFDRS calculations but is used by the fire weather forecasters in positioning weather systems on their charts and estimating affects of topography.

*State of Weather* – Record the highest applicable code number describing the weather at the basic observation time. This is a very critical input to the NFDRS as many of the calculated outputs may be over ridden based on the current observed state of weather. Automated weather stations do not do a very good job at estimating state of weather. As a result, the individual monitoring daily weather observations from such sites need to validate the information being provided by the automated site.

The following coding applies to the observed state of weather:

Code	Associated State of Weather
0	Clear (less than 1/10 of the sky cloud covered.)
1	Scattered clouds (1/10 to 5/10 of sky cloud covered).
2	Broken clouds (6/10 to 9/10 of sky cloud covered).
3	Overcast (more that 9/10 of sky cloud covered).
4	Foggy
5	Drizzling (precipitation of numerous fine droplets, misting).
6	Raining
7	Snowing or sleet
8	Showering (in sight of or occurring at station).
9	Thunderstorms in progress (lightning seen or thunder heard within 30 miles of observation site).

State of weather codes 5, 6 and 7 automatically outputs internal to the NFDRS calculations to zero, thus causing effected indices and components to be zero. Care must be taken to make sure that these are appropriate entries.

Solar radiation sensors are being phased in to provide an automatically measured value of cloudiness to replace the manual estimate of “state of the weather”.

*Maximum and Minimum Dry Bulb Temperature and Relative Humidity* – These are the highest and lowest values for each element measured at the observation site during the proceeding 24-hour period. The values are used to adjust the standard drying function of the NFDRS algorithms to more nearly reflect actual conditions. Remote automated stations automatically record this information. Manual stations should be equipped with maximum/minimum recording thermometers and a hygrothermograph to record this information. In the absence of maximum-minimum data, NFDRS processors can calculate the approximate values for both temperature and relative humidity though experience has shown that it is not as accurate as actual observations and over time can have an affect on the outputs.

*Precipitation Amount* – This is the total amount of precipitation that occurred within the preceding 24-hour period measured in inches or centimeters. (NFDRS processors convert metric to English units.) Amounts less than 0.005 should be recorded as a trace (T). Snow and hail should be melted before being measured.

*Precipitation Duration* – This is a critical input into the calculation of NFDRS indices and components. Report the actual number of hours that precipitation fell in the 24-hour period immediately proceeding the observation time. If several periods of precipitation occurred, the value entered must be the cumulative total of the duration of all periods of precipitation during the 24-hour period rounded to the next highest hour. If precipitation is occurring at the time of observation, record only the duration up until the time of observation, the remainder of the precipitation event will be reported the following day. Remote Automated Weather Stations automatically record precipitation duration. For manual stations obtaining accurate precipitation duration values is often difficult since seldom is the observer at the site for the full 24-hour period. The observer’s best

judgement is all that can be expected. Precipitation duration should, as best as possible, represent the total time that the fuels were exposed to liquid water, i.e. rain, snow, or sleet, during the 24-hour recording period.

*Fuels Wet Flag* –When rain is in progress or has recently ended at the time of observation, the fine fuels are often covered with water and may be saturated. NFDRS calculations require the observer to note whether this condition is present using the Fuels Wet Flag. A Y is entered for yes and a N is entered for no. Automated weather stations automatically assign a Fuels Wet Flag of Y to state of weather codes 5, 6, and 7. Persons reviewing data input must insure that this assignment is appropriate for current local conditions.

The Wet Flag should also be set to yes when fuels are covered with snow even though no precipitation occurred on the day the observations are being recorded. This feature controls a melting algorithm that is keyed to air temperature.

*LAL Lightning Activity Level* – This is a measurement of the cloud-to-ground lightning activity observed (or forecasted to occur) within a 30 mile radius of the observation site. The National Fire Danger Rating System requires two inputs for lightning activity level. The first cover covers the period from when the previous day's observation was taken until midnight (commonly referred to as Yesterday's Lightning) and the second covers the period from midnight until today's observation time (commonly referred to as Morning Lightning). The Fire Weather Forecasters of the National Weather Service use the same scale when forecasting lightning activity levels.

Lightning Activity Level is rated on a scale of 1 to 6 as described below:

- 1 No thunderstorms or building cumulus clouds observed.
- 2 A single or a few building cumulus clouds with only occasional one reaching thunderstorm intensity are observed. Thunderstorms or lightning need not be observed for this activity level to be assigned; however at least one large cumulus cloud must be present.
- 3 Occasional lightning (an average of 1 to 2 cloud-to-ground strikes per minute) is observed. Building cumulus are common; thunderstorms are widely scattered.
- 4 Frequent lightning (an average of 2 to 3 cloud-to-ground strikes per minute) is observed. Thunderstorms are common and cover 10 to 30 percent of the sky. Lightning is primarily of the cloud-to-cloud type but cloud-to-ground lightning may be observed.
- 5 Frequent and intense lightning (cloud-to-ground strikes greater than 3 per minute) is observed. Thunderstorms are common, occasionally obscuring the sky. Moderate to heavy rain may occur with the thunderstorms and light to moderate rains usually precede and follow the lightning activity.

Lightning of all kinds (cloud to cloud, in cloud and cloud to ground) is characteristically persistent during the storm period.


- 6 A dry lightning situation. Low lightning flash rate observed (less than one to three cloud-to-ground strikes per 5-minute period per storm cell passage). Scattered towering clouds with a few thunderstorms. Bases of the clouds are high. Virgo is the predominate form of precipitation.




### 2.1.6 - APPENDIX VI—Concept of Climatic Break Points Described

The concept of break points is often confusing for people who don't remember much statistics. The following is a simplified description of the concept as it is used in determining climatological break points for inclusion in your NFDRS station record.


There are three basic types of statistical distributions. The simplest is a Seasonal Distribution. This is a plot of a weather parameter or NFDRS output value against the day that it occurred. The value can be for a single year or an average of several years. A graph might something look like the display below.

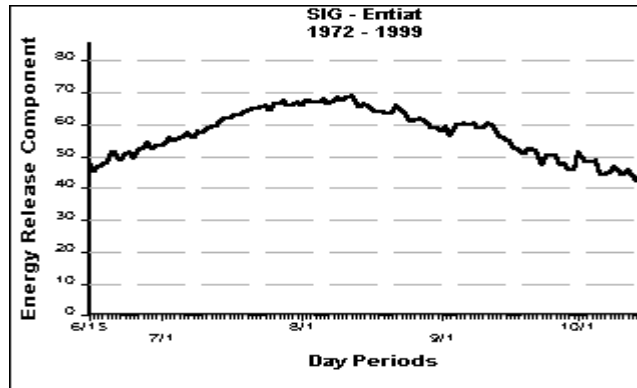

The second type of statistical distribution is a Standard Frequency Distribution. It is constructed by plotting the number of times a particular value occurs within the data set and displaying them in a graphic format. A Standard Frequency Distribution looks like the example below.

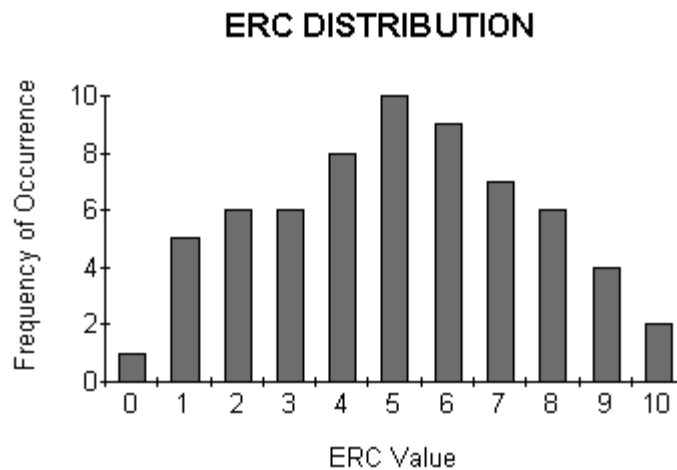

The final example of a statistical distribution is the Cumulative Frequency Distribution. It is constructed by plotting on the “Y” axis the number of times (frequency) a value occurs in the data set that is equal to or less than the value being plotted on the “X” axis. When the “Y” axis value is expressed as a percent of the total data set the distribution is referred to as a Percentile Frequency Distribution as displayed in the graph below.

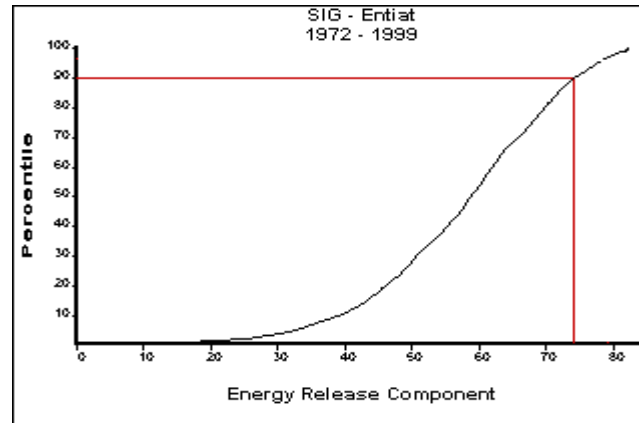

The Staffing Class Breakpoint is the value on the horizontal “X” axis that corresponds to the percentage of the total observations you want to group in staffing classes 1, 2 and 3. For example, if your data set has 1200 observations and your agency recommends using the 90<sup>th</sup> percentile as a breakpoint for ERC between class 3 and 4, your breakpoint value would be the point on the graph that 90% of the values occurred at or below. In the example it would be 74 or the point on the ERC scale where the 1080<sup>th</sup> observation occurred (90% of 1200). If your agency uses the 80<sup>th</sup> percentile as the breakpoint, the ERC value would be 70 or the point on the ERC scale that the 960<sup>th</sup> observation occurred (80% of 1200).

In the examples above we considered Energy Release Component. Any of the NFDRS outputs or weather parameters could be plotted. The general shape of the curves would be the same. The magnitudes (Y-axis) may be different because of the different scales the NFDRS indices and components and the weather parameters have. The resultant breakpoints when using NFDRS outputs or weather data are referred to Climatological Breakpoints.

If you plot cumulative fire occurrence instead of weather or NFDRS outputs, the same principles apply. The resultant breakpoints are referred to as the Fire Business Thresholds.

## 2.1.7 - Appendix VII--Subjects Related to the National Fire Danger Rating System

### 2.1.7.1--Haines Index:

This is a fire weather index based on the stability and moisture content of the lower atmosphere that measures the potential for existing fires to become large fires. (It is not a predictor of fire starts). It uses a numeric scale ranging from 2 to 6 with six being the highest potential for large fires. It is named after its developer, Donald Haines, a Forest Service research meteorologist, who did the initial work and published the scale in 1988.

For years, meteorologists and fire researchers have known that atmospheric stability contributes significantly to the intensity and spread of fires. Haines compared twenty years of fire occurrence data with atmospheric stability data and found a strong relationship between large fire occurrence and the temperature lapse rate (change in temperature as you cross through the atmosphere vertically) and moisture content of the lower layers of the atmosphere. Haines assigned scaling factors to each of the atmospheric variables such that when added together formed an index that measured the potential for large fires.

The following table displays the Haines Index and associated large fire potential:

<u>Haines Index Value</u>	<u>Potential for large fires</u>
2 or 3	very low
4	low
5	moderate
6	high

Additional information about the Haines Index include Werth and Ochoa (1993) and Werth and Werth (1997) (See Section 3.0 References).

### 2.1.7.2--Normalized Difference Vegetation Index (NDVI)

The Normalized Difference Vegetation Index is a set of four vegetation greenness maps derived weekly from data collected by EROS satellites. These maps have a spatial resolution of 1-kilometer (.6 miles). They can be downloaded from WIMS or are available through the Wildland Fire Assessment System.

Visual Greenness Maps – These maps portray vegetation greenness compared to a very green reference such as an alfalfa field or golf course. The resulting image is similar to what you would expect to see from the air. Normally dry areas will never show as green as normally wetter areas.

Relative Greenness Maps – These maps portray how green the vegetation is compared to how green it has been historically (since 1989). Because each pixel is normalized to its own historical range, all areas (dry to wet) can appear fully green at some time during the growing season.

Departures from Average Greenness Maps – These maps portray how green each pixel currently is compared to its historic average greenness for the corresponding week of the year.

Live Moisture Maps – These maps portray experimental live vegetation moisture with values ranging from 50 to 250 percent of dry weight.

As would be expected with any satellite-sensed data, there will be instances when cloud or snow cover prevents accurate coverage. To minimize this occurrence, the actual maps are a composite of several satellite passes over an area, thus the reason for weekly updates rather than daily.

Additional information on the Normalized Departure Vegetation Index and associated greenness maps can be found in Burgan and Hartford (1993) and Burgan et al (1996).

### **2.1.7.3--Lightning Detection System**

The Bureau of Land Management, Forest Service, National Weather Service and several states have contracts with Global Atmospheric, Inc. (GAI) to provide real time lightning detection information. The following descriptive information was taken from GAI's web site and is included for information only.

The National Lightning Detection Network (NLDN), owned and operated by Global Atmospheric, Inc. (GAI), incorporates over 20 years of research and development in lightning detection and location. It is a state-of-the-art lightning location system that provides reliable, cost-effective data to a variety of demanding customers. The Electric Power Research Institute (EPRI) commenced the network's original formation for the purpose of helping utilities make objective decisions regarding line maintenance priorities, effective crew dispatch, and future design and placement of utility lines. These goals have been achieved and expanded upon to address applications in multiple industries and environments. Major utilities, airlines and government agencies, as well as telecommunications, safety and military installations are just a few of the entities that make daily operational decisions based on data provided by the NLDN.

Lightning data collected by the NLDN is available for use in two different categories, real time and archive. Real time data subscribers receive live, second-by-second data on lightning activity within their own designated area of application, up to and including the 48 contiguous states.

The NLDN's vast archive data library contains over 160 million flashes from 1989 to the present. Data can be provided in ASCII format for analysis on a users' own workstation, or provided in packed binary formats for display and analysis via GAI display software. Analytical services and reports produced by trained GAI personnel are also available for tailored historical studies or specific geographical evaluations.

The NLDN consists of over 100 remote, ground-based sensing stations that monitor cloud-to-ground lightning activity across the contiguous 48 states. Using exclusive,

patented technologies and powerful electronics, lightning strikes are differentiated from the vast amount of background noise found in the atmosphere.

Within seconds of a lightning strike, central analyzers at the Network Control Center (NCC) process information on the location, time, polarity, and amplitude of each strike via an advanced, satellite-based communications network. Unprecedented location accuracy has been achieved by combining the very precise capabilities of waveform processing, Global Positioning System (GPS) time synchronization, high-speed signal processing, and wide-band peak gated magnetic direction finding techniques. The result is extremely accurate location information and a high level of redundancy for improved data integrity and reliability.

## 2.1.8 Appendix VIII – Season Codes and Greenness Factors

### Use of Seasons Codes and Greenness Factors with the 1988 Revisions to NFDRS

In 1988 a revised set of fuel models and calculation formulae were released for use as an alternative to the previously released 1978 version of the National Fire Danger Rating System. The primary purpose of the 1988 revisions was to improve drought response in humid environments and to provide more flexibility in the greening and curing of live fuels.

#### Greenness Factors and Season Codes

Instead of allowing the model to calculate the herbaceous and woody fuel moisture as the greening process occurs, the 1988 revisions allow the user to control the process by entering season and greenness factor values periodically throughout the season. The 1988 NFDRS revisions recognize four season-like conditions (Winter, Spring, Summer, and Fall). It also uses greenness factors that range from 0-20 where 0 represents a fully cured condition and 20 represents as green as the herbaceous and shrub vegetation ever gets in the area. As the season progresses, the user must manually adjust the season and greenness factors to reflect the current conditions in their area. There is no hard and fast rule to use as to when to switch season codes and how frequently to change greenness factors. Users need to watch the development of the live vegetation in their area and adjust the codes only when physical conditions changes.

The season codes represent stages in the life cycle of the live herbaceous and shrub vegetation and are not tied directly to calendar dates. Similarly greenness factors represent a scaling of plant development progression through their life cycle from cured to green and back to cured again.

The following describes what happens within the NFDRS model with changes in the season code.

Winter—(Code 1) Live herbaceous and woody moistures are set to their minimums. The greenness factor value is always 0. The live herbaceous moisture content is equal to the fine dead fuel moisture content and the live woody fuel moisture is equal to the default dormant season woody fuel moisture as determined by climate class. (This is the season of plant dormancy and is similar to the way 1978 models handles pre-green or frozen conditions.)

Spring—(Code 2) Live woody and herbaceous fuel moistures are increasing rapidly. This is generally the green-up period. Greenness factors increase from 1 to 20 during this period. The herbaceous and woody fuel moistures are calculated for the 1988 fuel models using the same formulae as is used in the 1978 models but with an adjustment applied. The adjustment factor is the assigned greenness factor divided by 20.

Summer—(Code 3) Live woody and herbaceous moistures fluctuate in response to drying and wetting cycles. Greenness factor values fluctuate up and down within the 20 and 1 range during this period. Annual herbaceous vegetation most likely will cure sometime during this period. In the NFDRS model the live fuel moisture is initially calculated

using the same formulae as is used after the completion of greening in the 1978 models but is adjusted by a factor equal to the greenness factor divided by 20. The woody fuel moisture is calculated using the same formulae as is used in the 1978 models and it too is adjusted by the greenness factor.

Fall—(Code 4) Live herbaceous and woody fuel moistures are decreasing. Vegetation is entering dormancy. Greenness factors drop during this period approaching 0. The live herbaceous and woody fuel moistures are calculated the same as for the transition period in the 1978 models though is adjusted for greenness by a factor equal to the assigned greenness factor divided by 20.

The Season Codes and Greenness factors work independently of KBDI. The table on page 16 of Burgan (1988) is only a suggested relationship between KBDI and Greenness Factors to be used when starting a station mid-season.

The Herbaceous and Shrub Greenness factors can be different, depending on local plant species and how they respond during the growing season.

### 3.0 References

- Anderson, H.E., 1982: *Aids to Determining Fuel Models For Estimating Fire Behavior* National Wildlife Coordinating Group, NFES 1574, Boise, Idaho, 22 pp.
- Andrews, P. L., and L. S. Bradshaw, D. Bunnell, G. Curcio; 1997: *Fire Danger Rating Pocket Card for Firefighter Safety*.
- Andrews, P. L., and R.C. Rothermel; 1982: *Charts for Interpreting Wildland Fire Behavior Characteristics*. National Wildlife Coordinating Group, NFES 0274, Boise, Idaho. 22 pp.
- Bradshaw, L. S., R. E. Burgan, J. D. Cohen, and J.E. Deeming; 1983: *The 1978 National Fire-Danger Rating System: Technical Documentation*. USDA Forest Service; Intermountain Forest and Range Experiment Station, General Technical Report INT-169, Ogden, Utah, 44 pp.
- Burgan, R. E.; 1988: *1988 Revisions to the 1978 National Fire-Danger System*. USDA Forest Service, Southeastern Forest Experiment Station, Research Paper SE-273, Asheville, North Carolina, 39 pp.
- Burgan, R. E.; 1993: *A Method to Initialize the Keetch-Byram Drought Index*. Western Journal of Applied Forestry, **8** (4) 109-115.
- Burgan, R. E. and R. A. Hartford, 1993: *Monitoring Vegetation Greenness with Satellite Data*, USDA Forest Service, Intermountain Research Station, General Technical Report INT-297, Ogden, Utah, 13 pp.
- Burgan, R. E., R. A. Hartford, and J. C. Eidenshink, 1996: *Using NDVI to Assess Departure from Average Greenness and its Relation to Fire Business*, USDA Forest Service, Intermountain Research Station, General Technical Report INT-333, Ogden, Utah, 8 pp.
- Byram, G. M., 1959: *Combustion of Forest Fuels*. In: Forest Fire Control and Use p. 82. K. P. Davis, ed. McGraw-Hill Book Co. New York.
- Deeming, J. E., R. E. Burgan, and J. D. Cohen, 1977: *The National Fire-Danger Rating System – 1978*. USDA Forest Service, Intermountain Forest and Range Experiment Station, General Technical Report INT-39, Ogden, Utah, 63 pp.
- Finklin, A.I. and W. C. Fischer, 1990: *Weather Station Handbook-an Interagency Guide for Wildland Managers*. National Wildlife Coordinating Group; PMS 426-2, NFES 2140, Boise, Idaho, 237 pp.
- Keetch, J. J. and G. M. Byram, 1968: *A Drought Index for Forest Fire Control*. USDA Forest Service, Southeastern Forest Experiment Station, Research Paper SE-38, Asheville, North Carolina, Revised 1988, 32 pp.



Schlobohm, P. M., 2000: *Applications of the Fire Danger Pocket Card for Firefighter Safety*. In proceedings: 2nd Wildland Fire Safety Summit, Winthrop, Washington, October 1998. International Association of Wildland Fire, Fairfield, Washington.

Werth J. and P.A. Werth, 1997: *Haines Index Climatology for the Western United States*, US Dept. of Commerce, National Oceanic and Atmospheric Agency, Western Region Technical Assessment No. 97-17. 7 pp.

Werth, P.A. and R. Ochoa, 1993: *Evaluation of Idaho Wildfire Growth using the Haines Index and Water Vapor Imagery*, Weather Forecasting **6** (2) 71-76.

**Suggested websites:**

<http://famweb.nwcg.gov> - National Fire and Aviation Management Web Applications

<http://www.fs.fed.us/fire/planning.nist> - Fire Applications Support

<http://www.fs.fed.us/land/wfas> - Wildland Fire Assessment System

<http://www.fire.blm.gov/nfdrs> - Firefighter's Pocket Card Homepage